






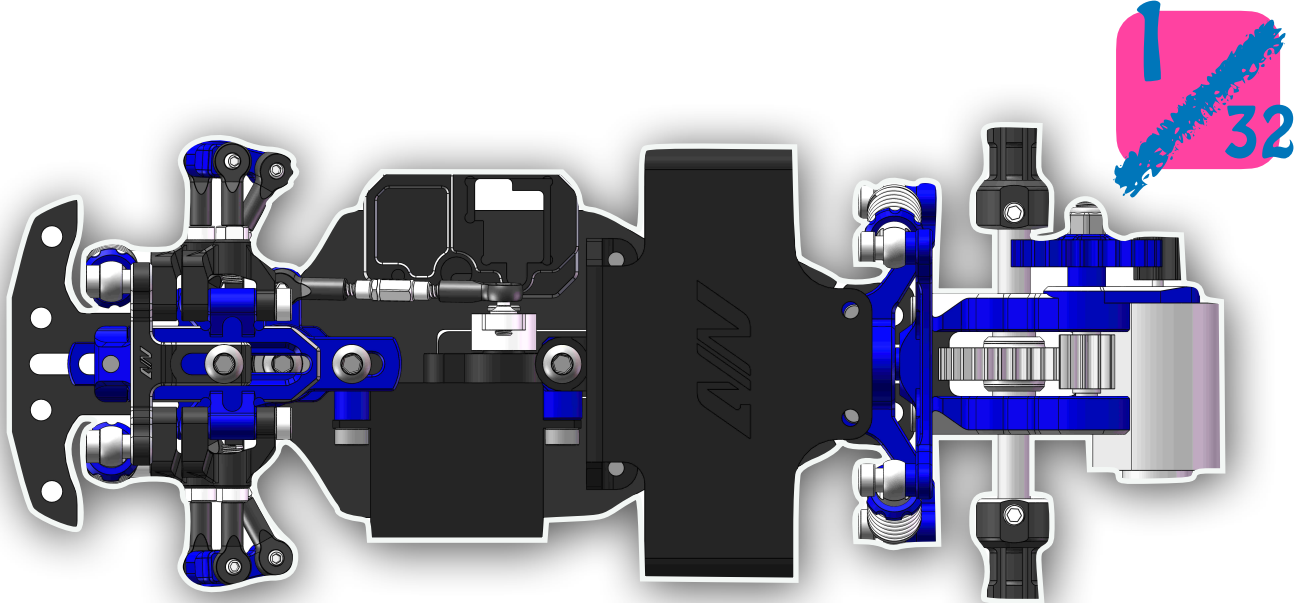


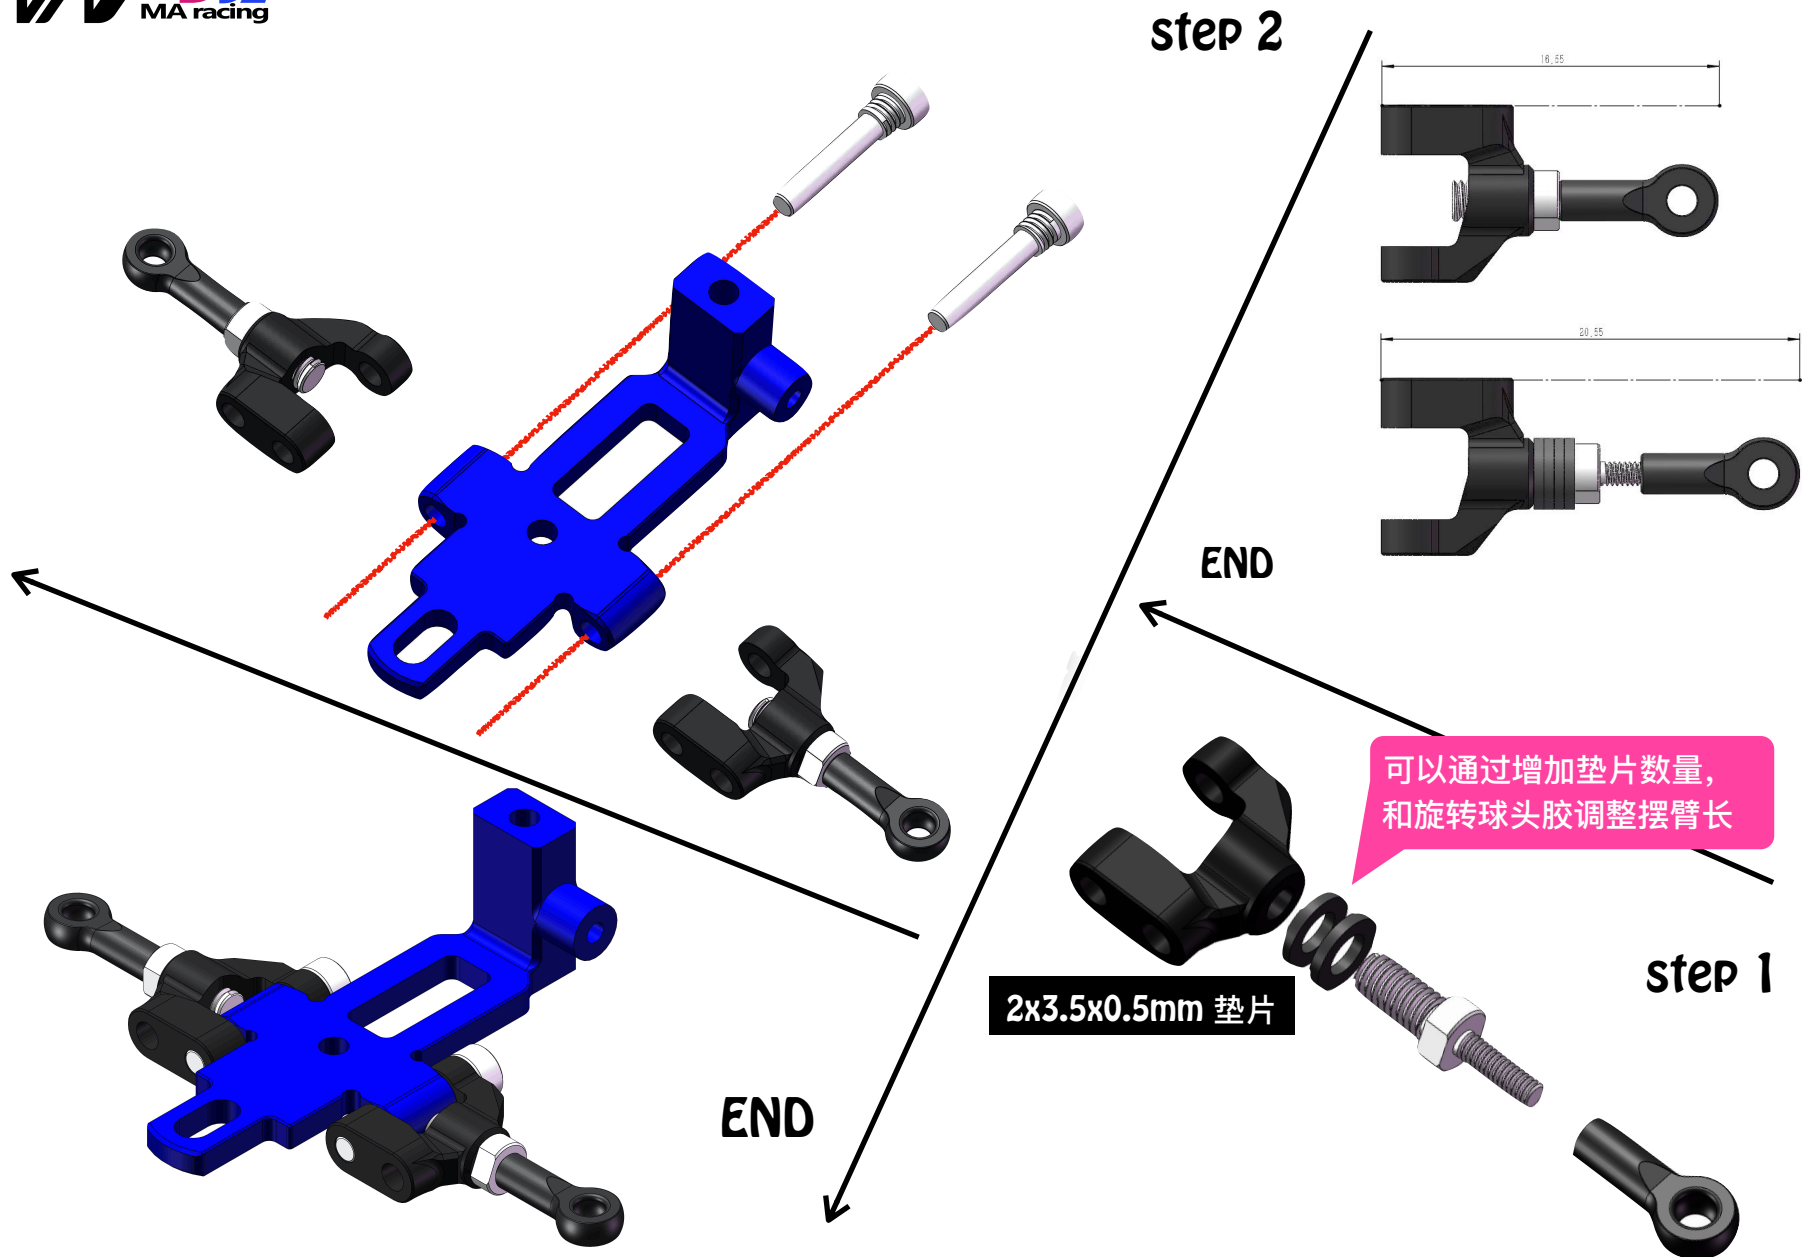


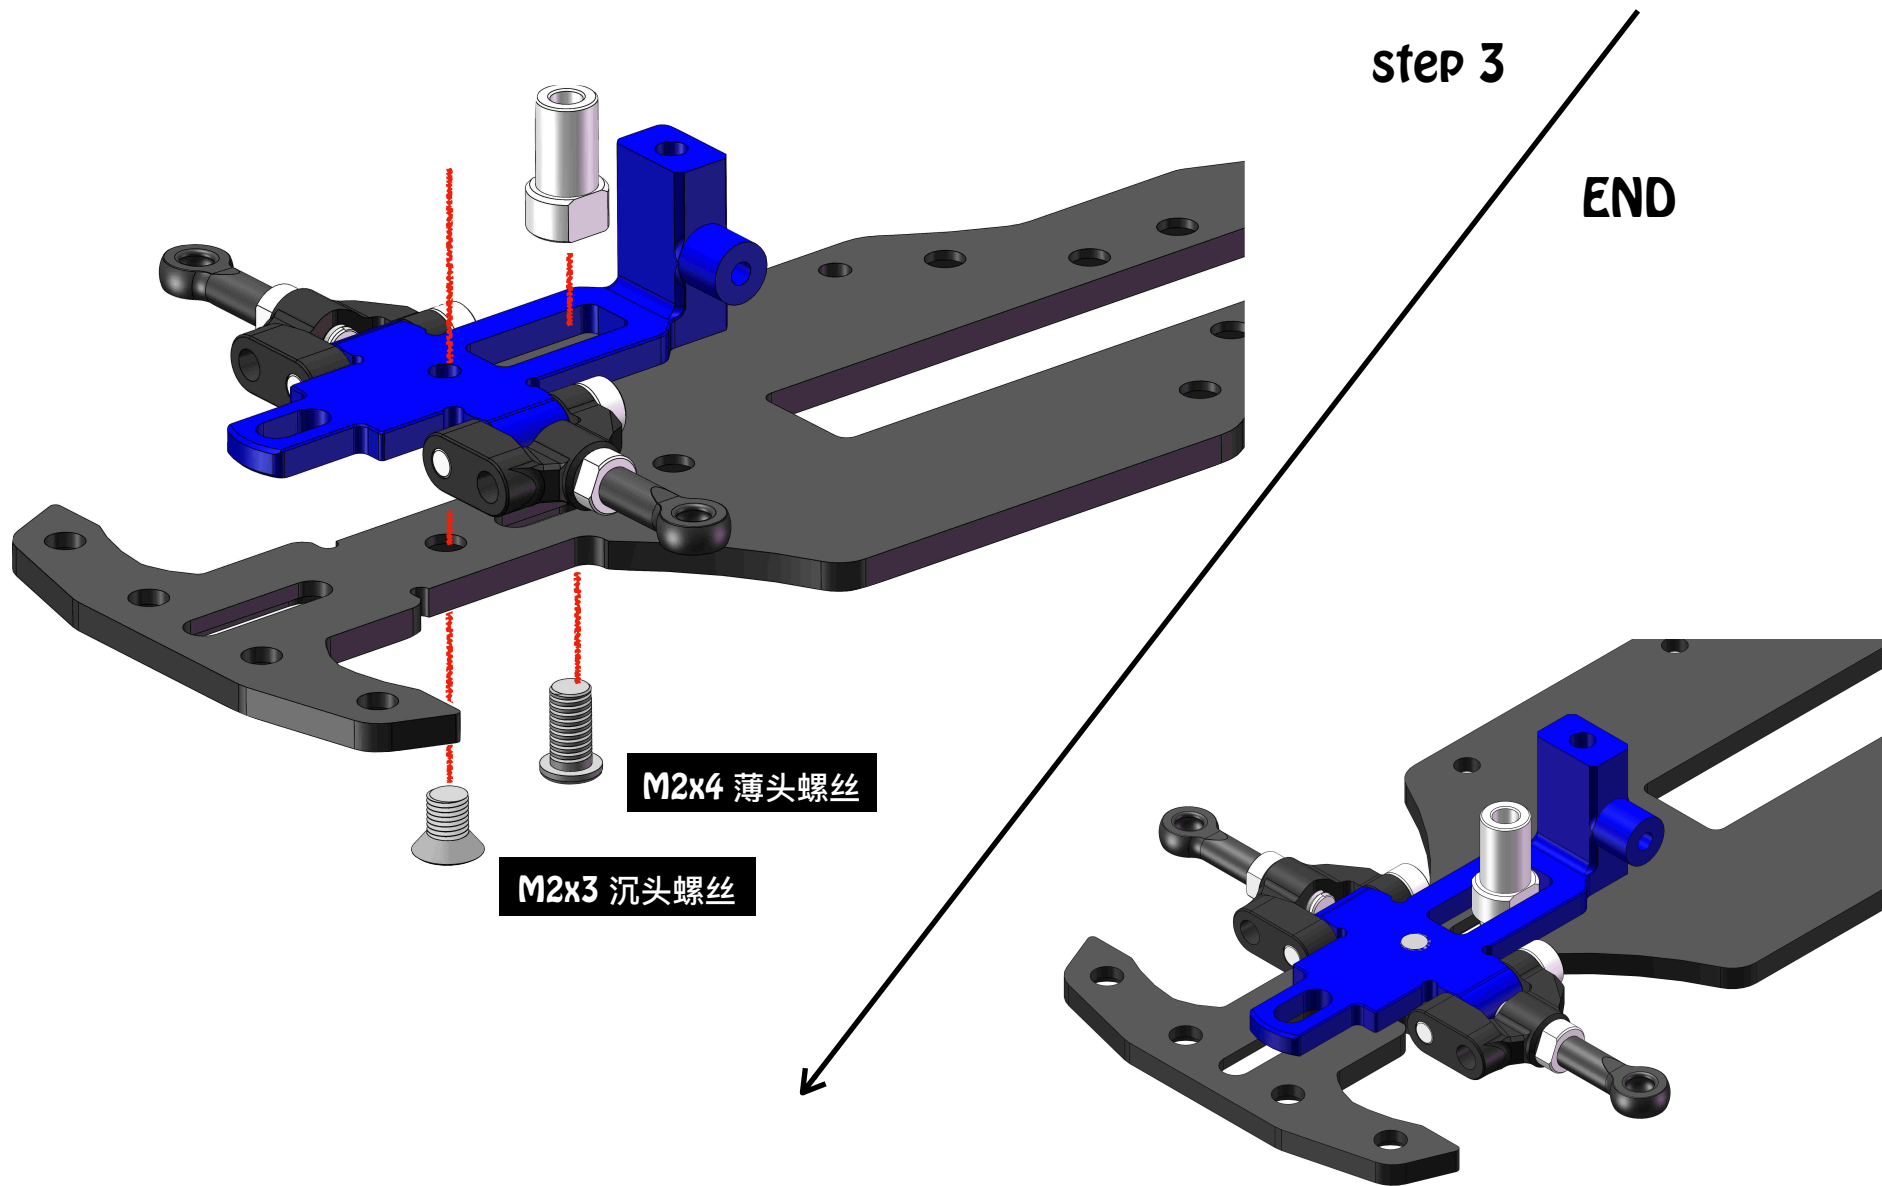


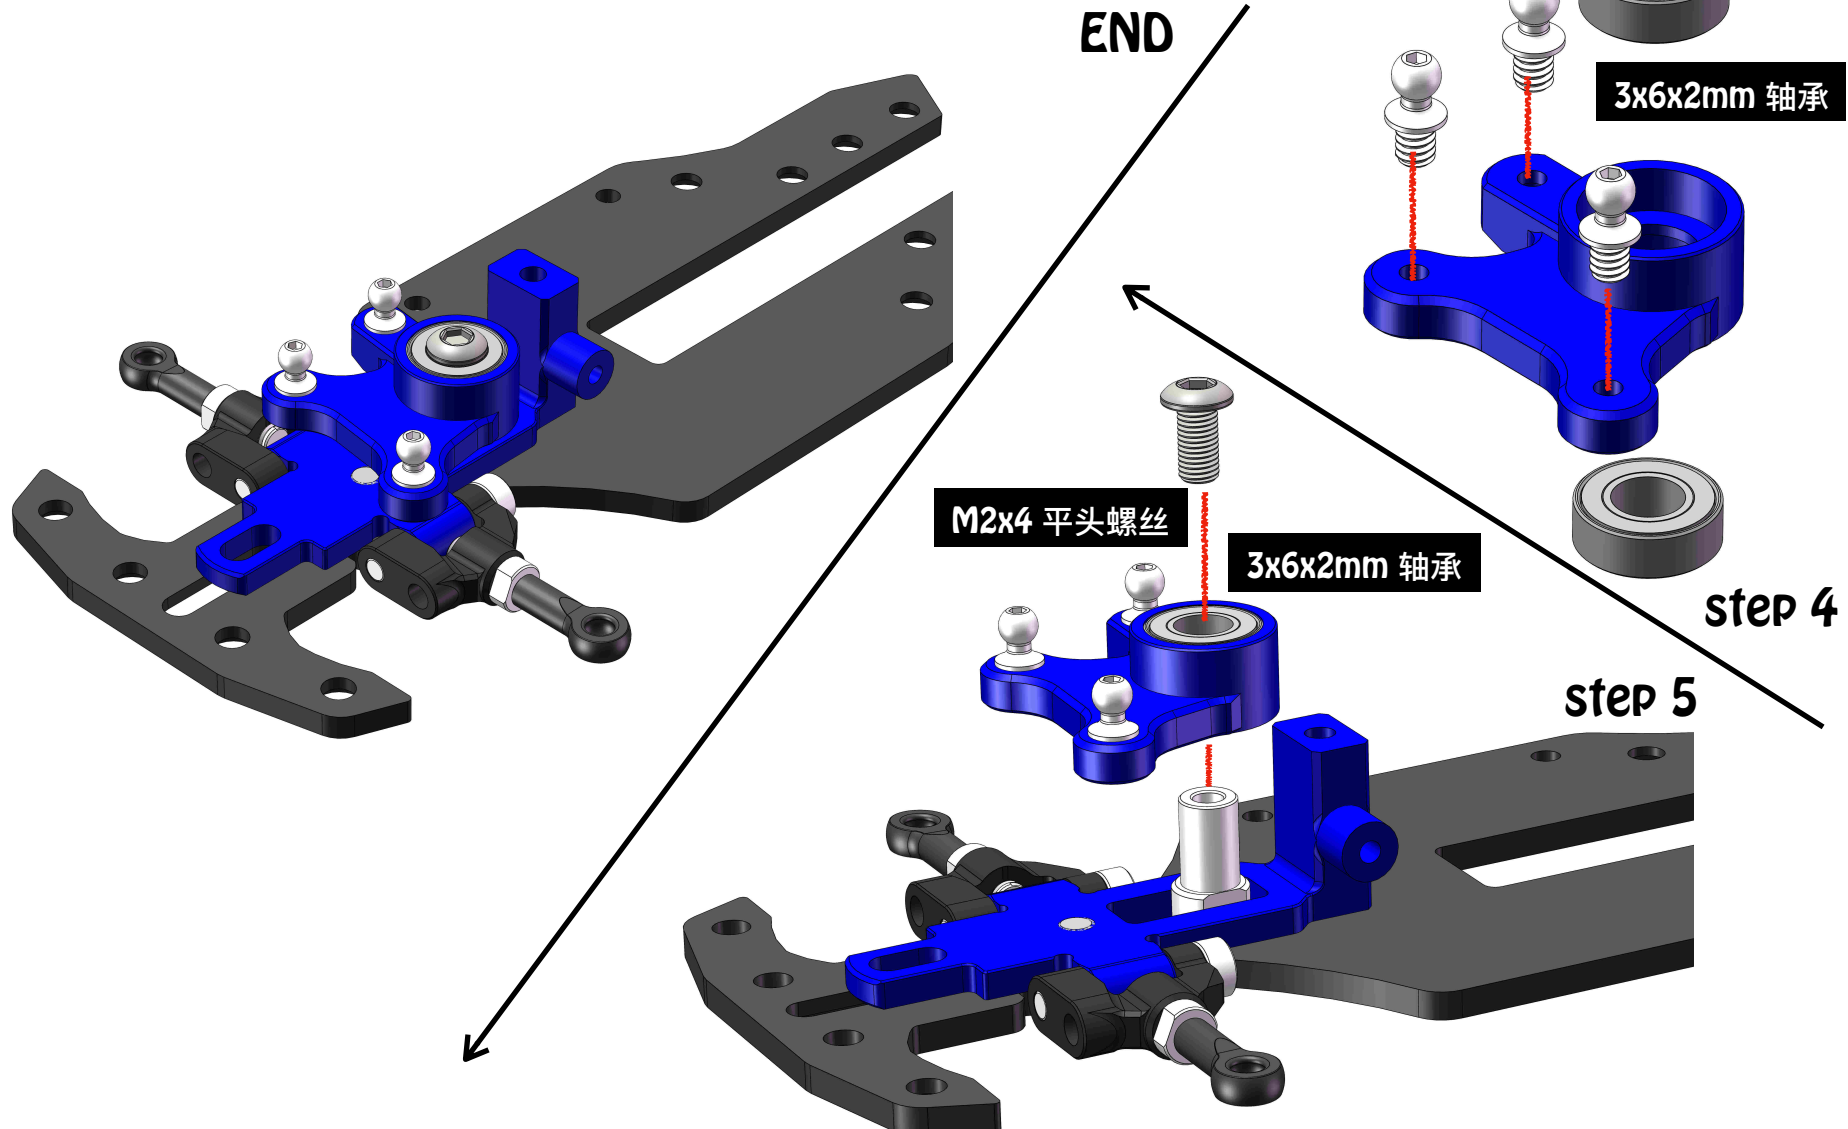

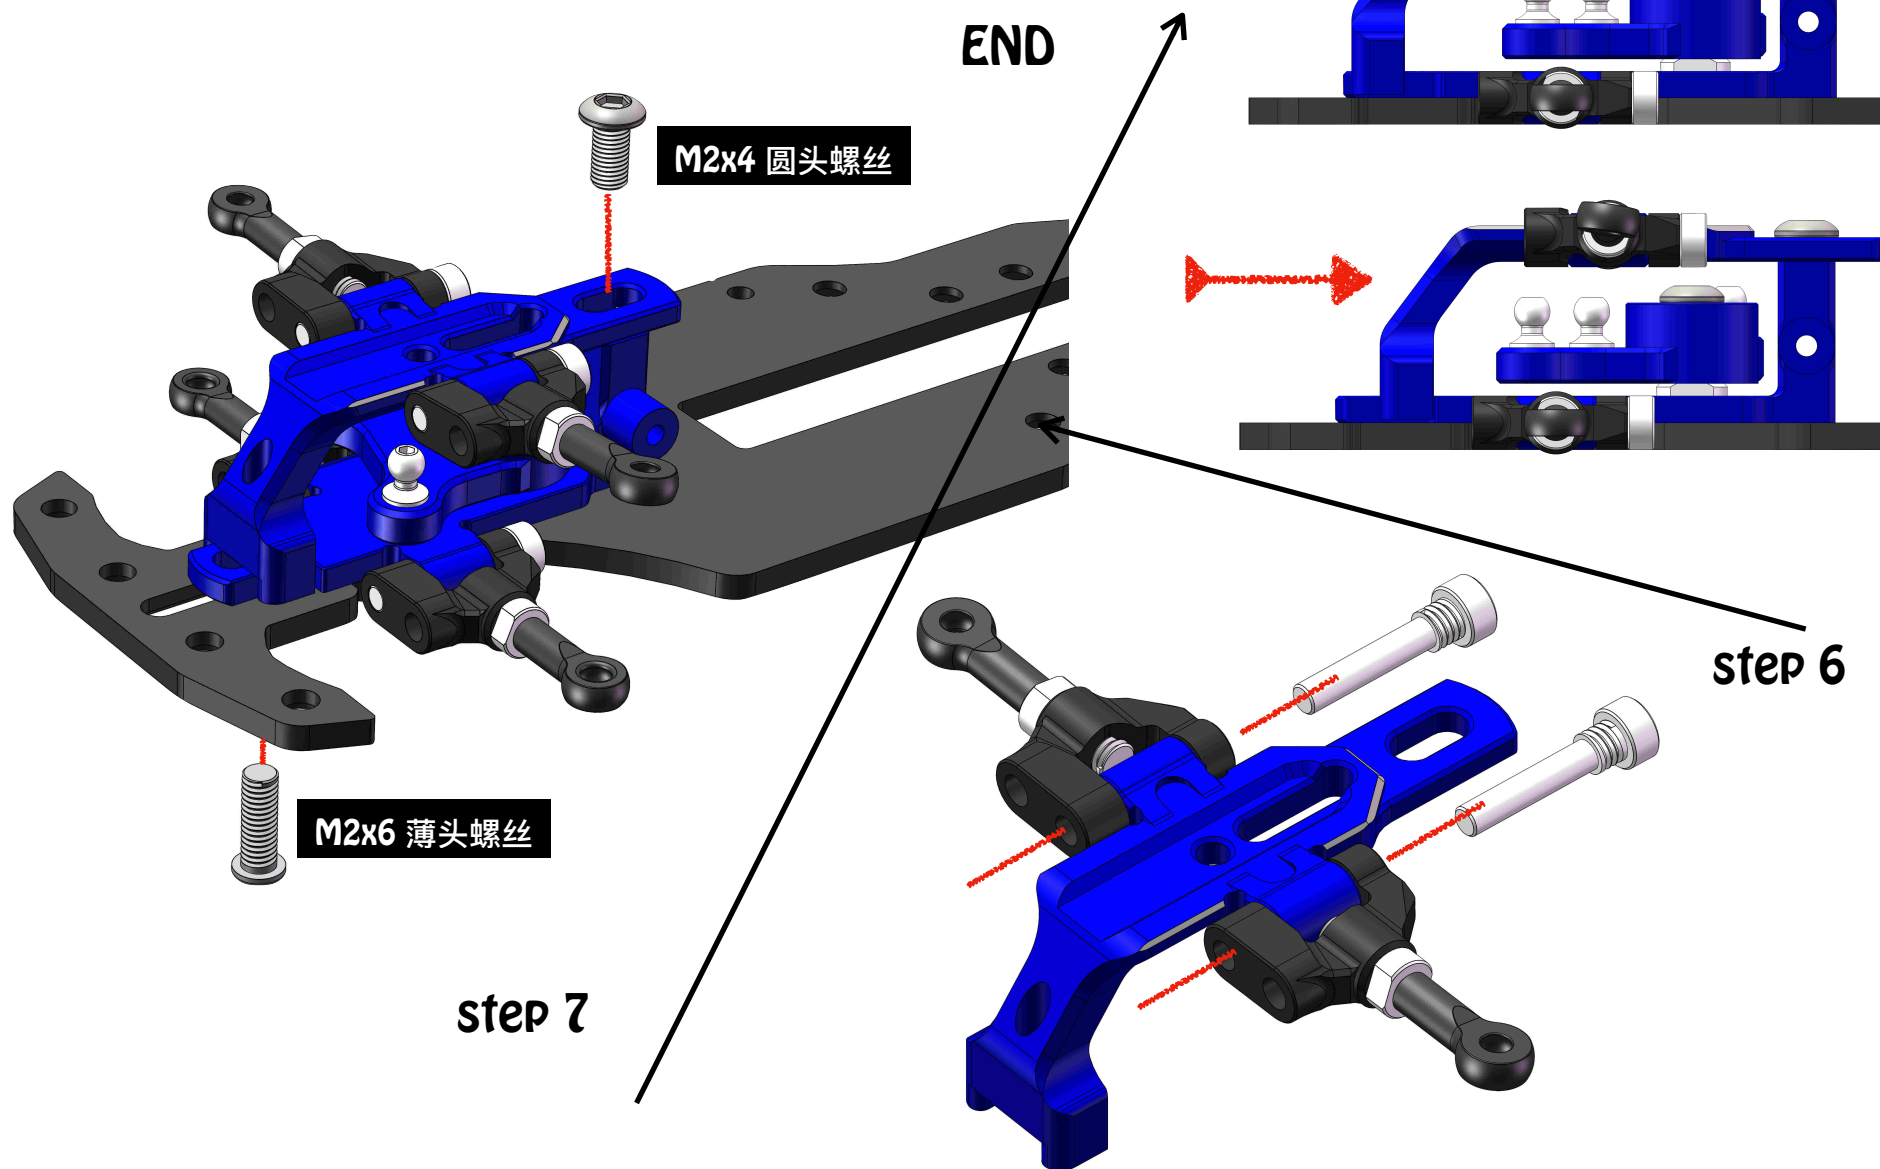


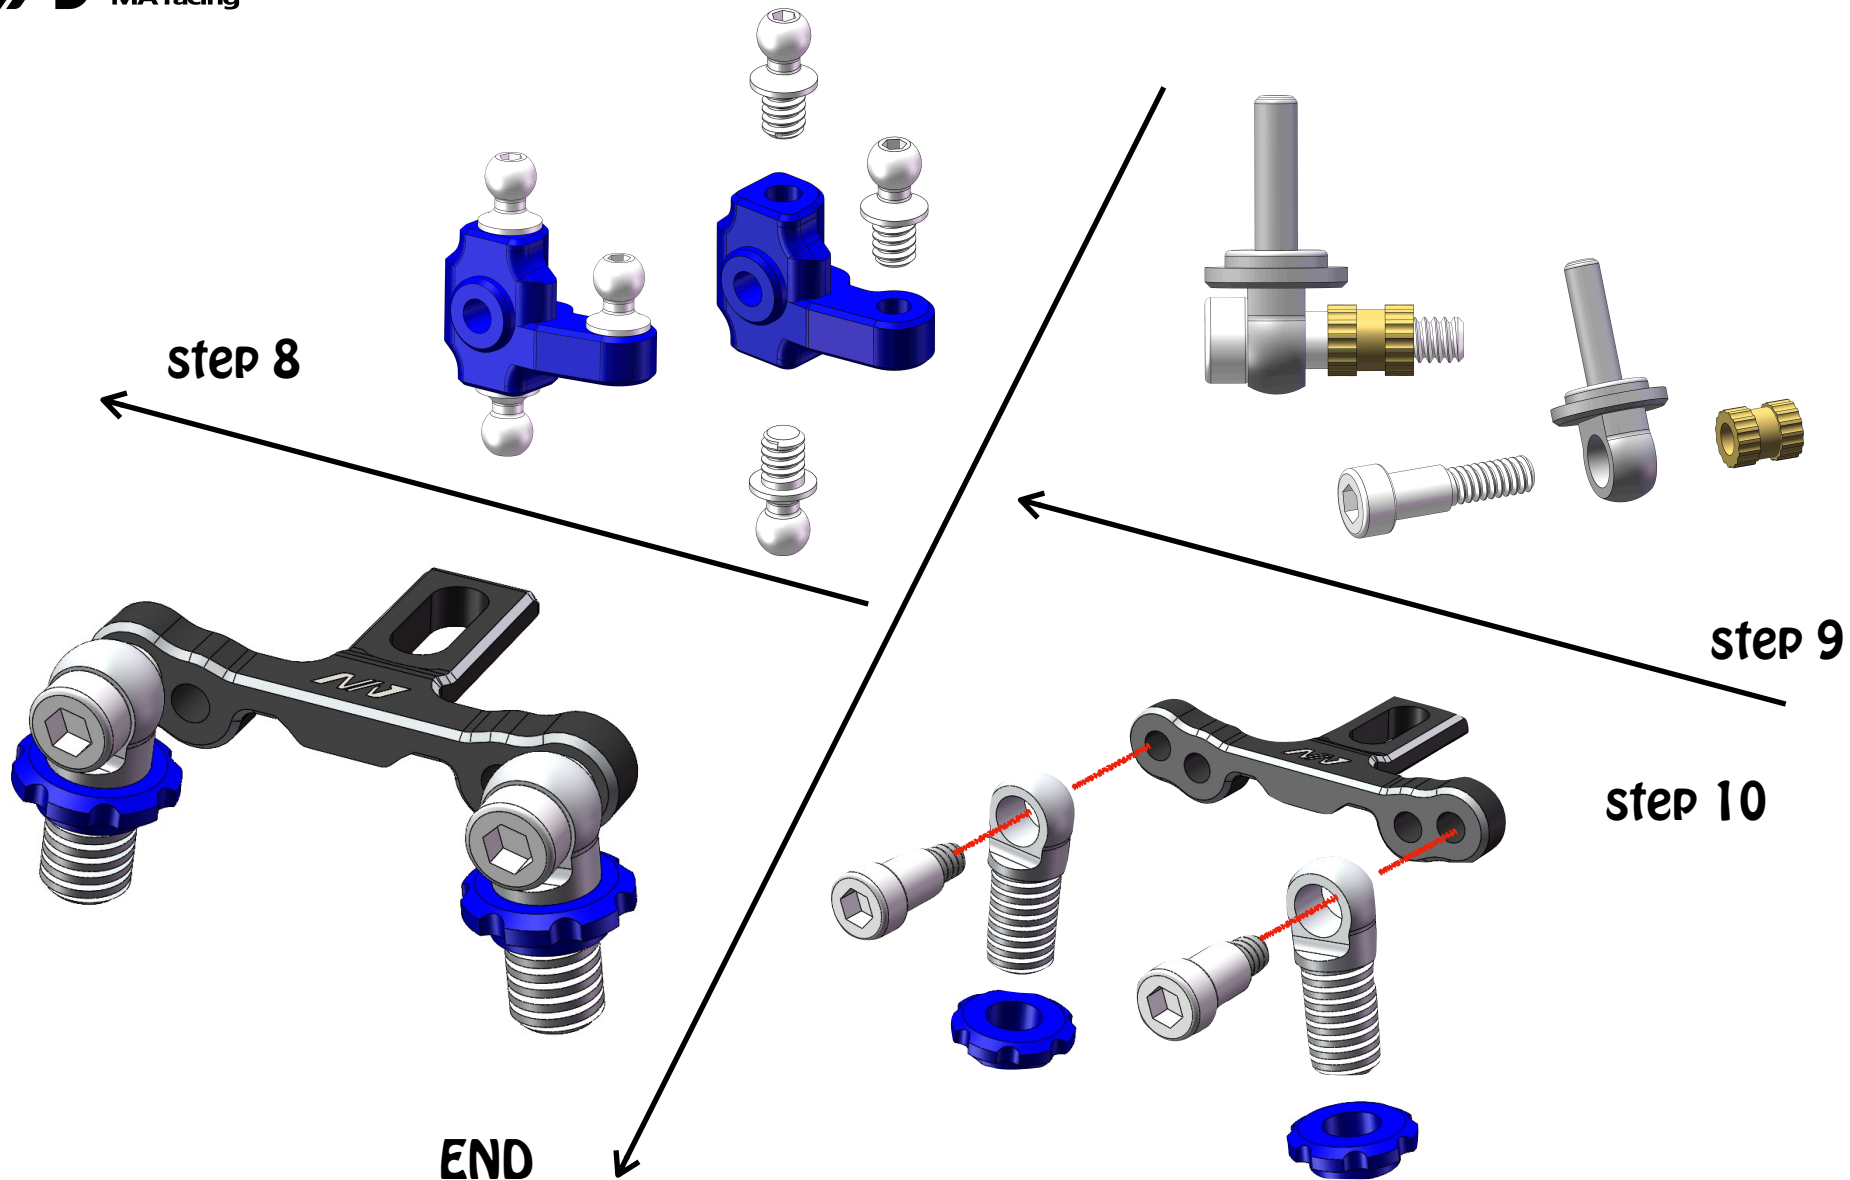

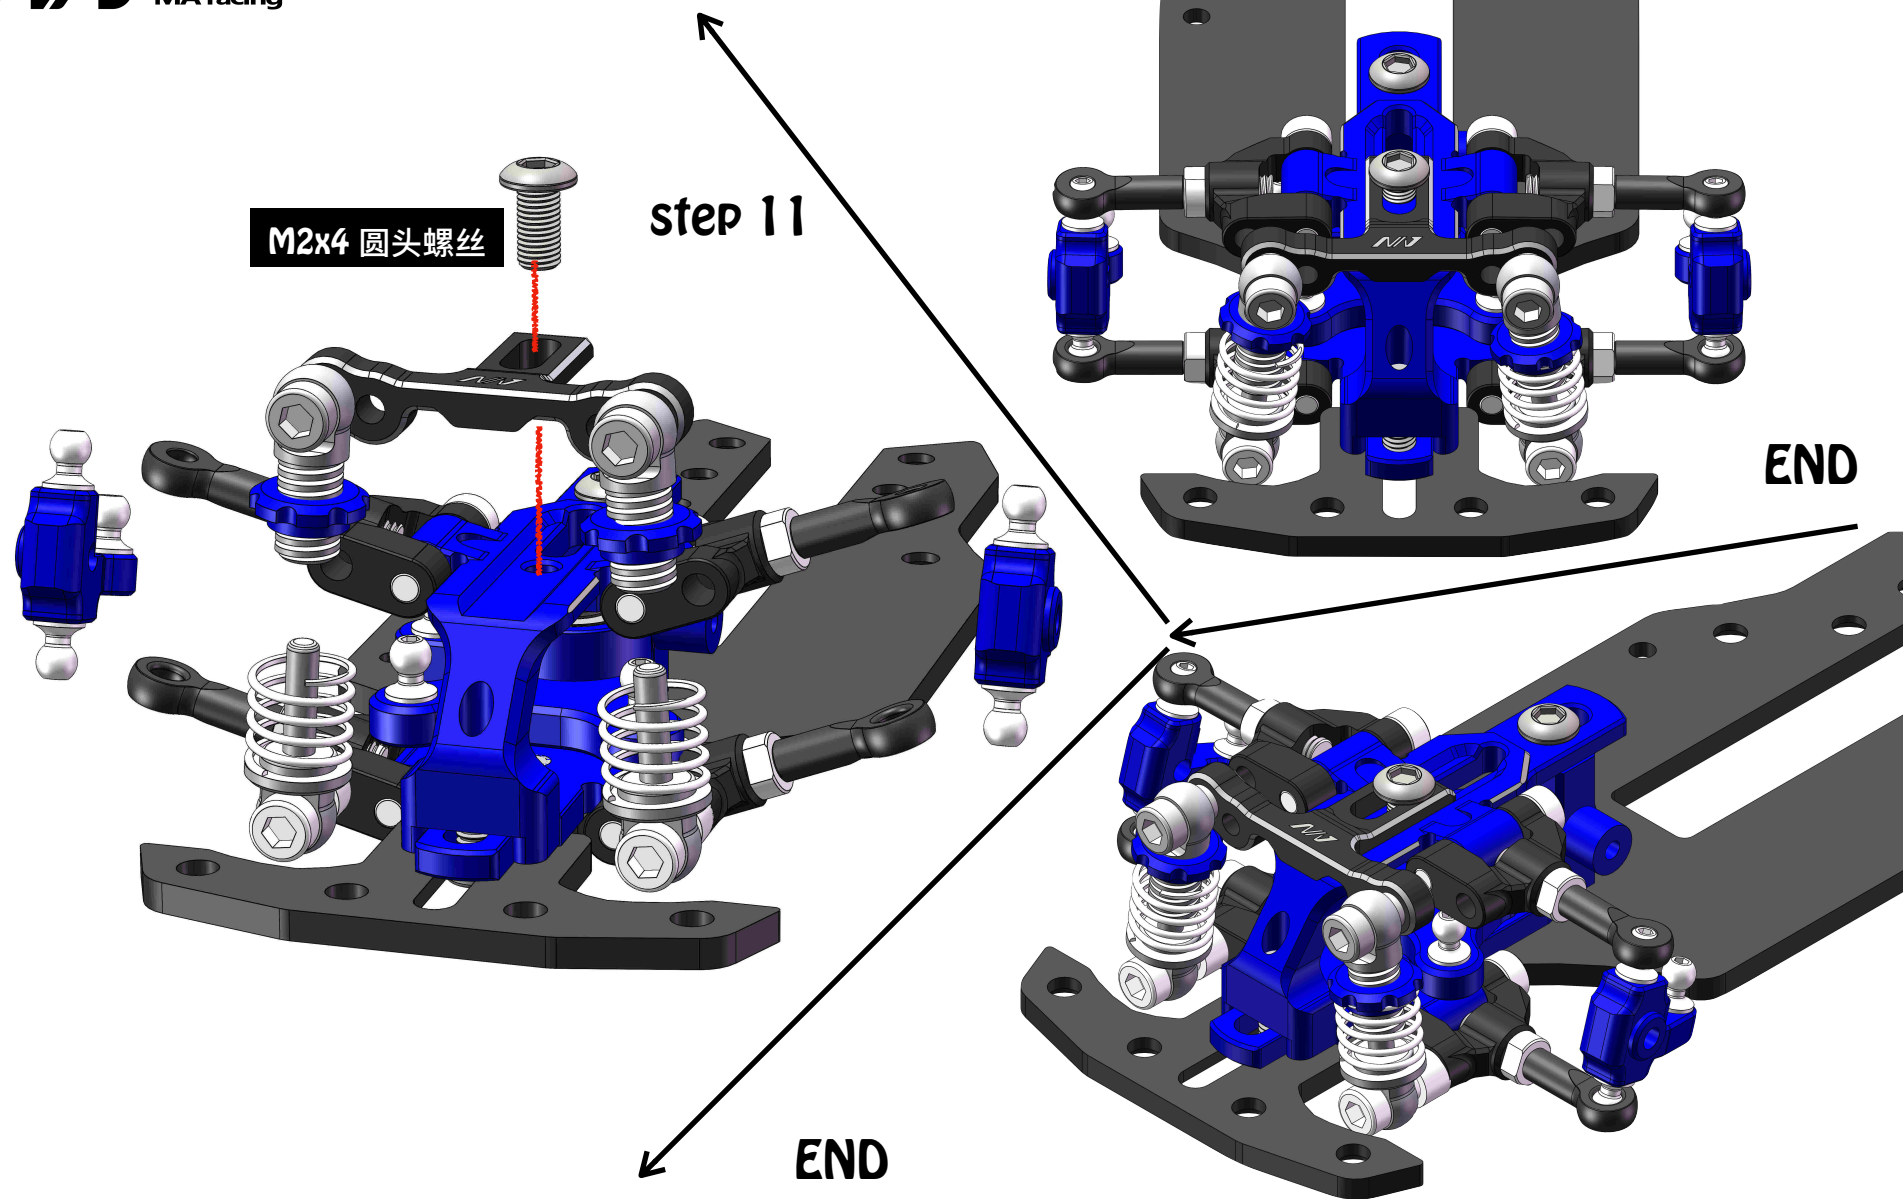




逆时针旋转




step 12



顺时针旋转

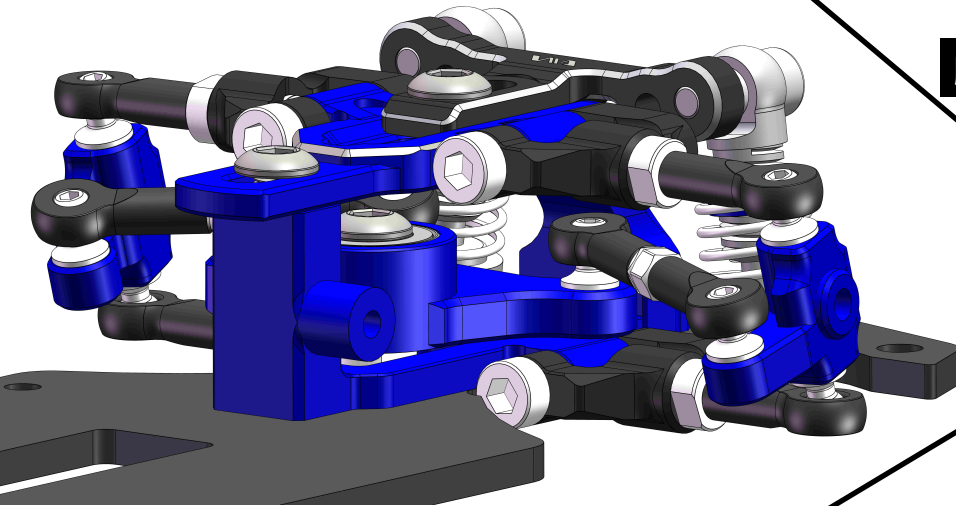

END

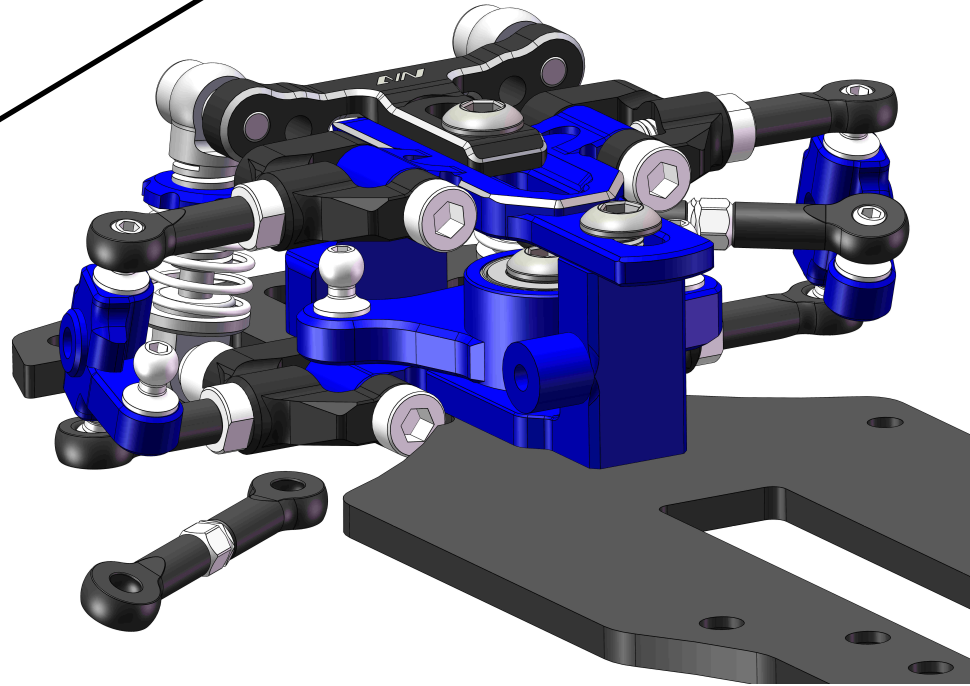



step 13

END

5x2x2.5mm 轴承


3x6x2.5MM 轴承

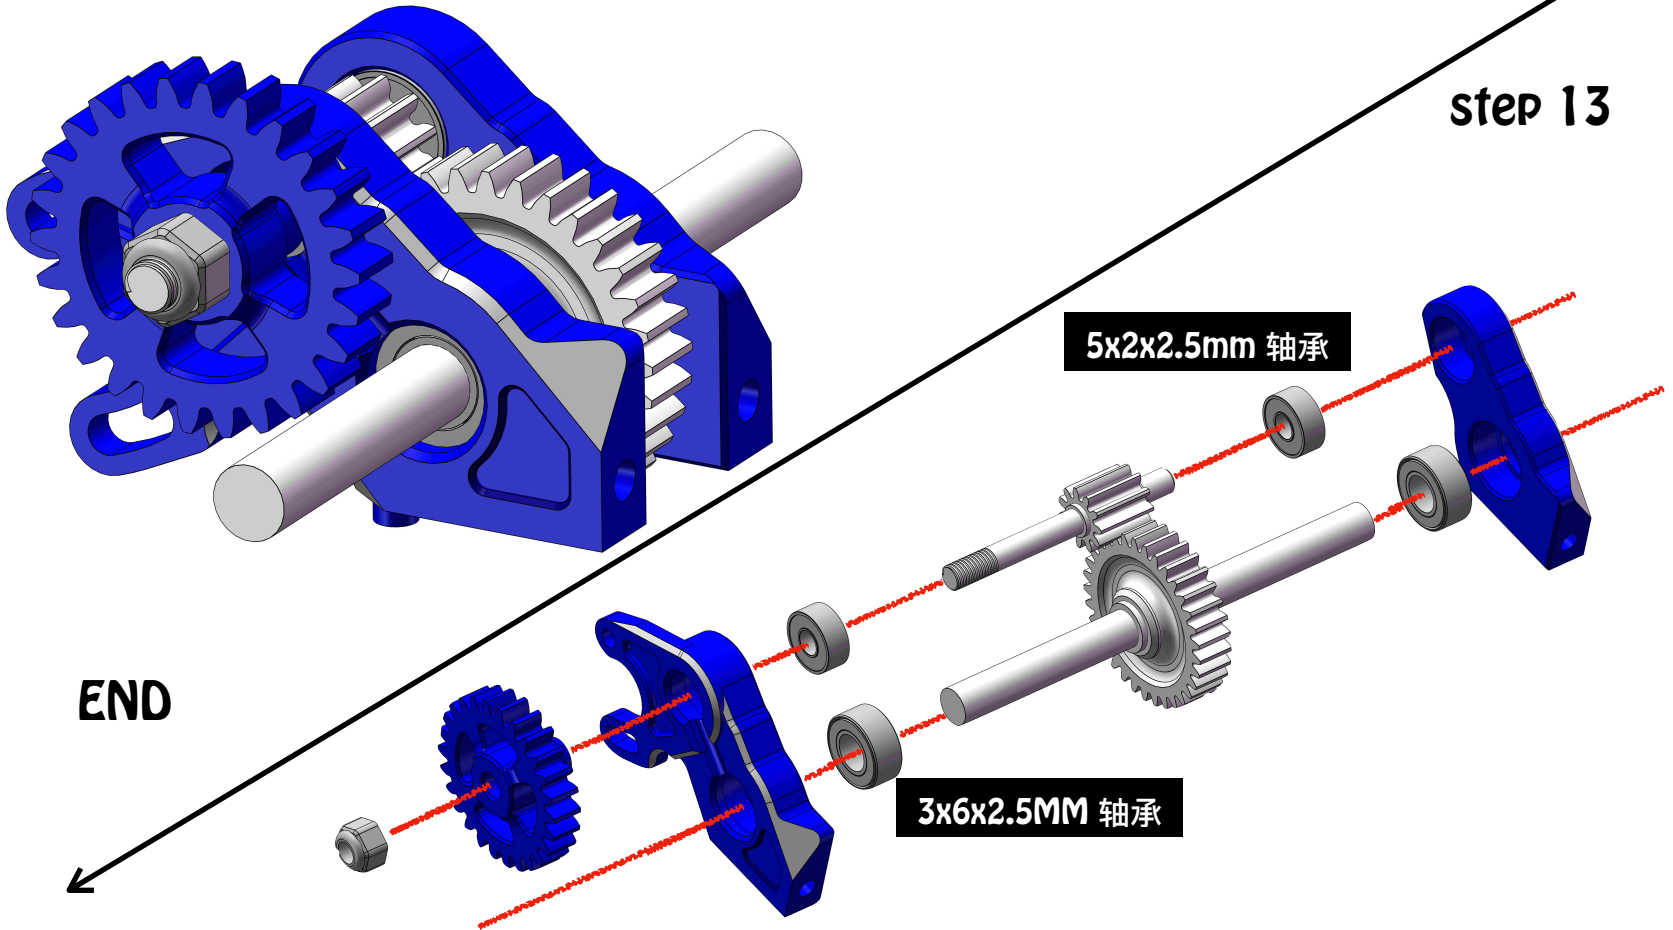

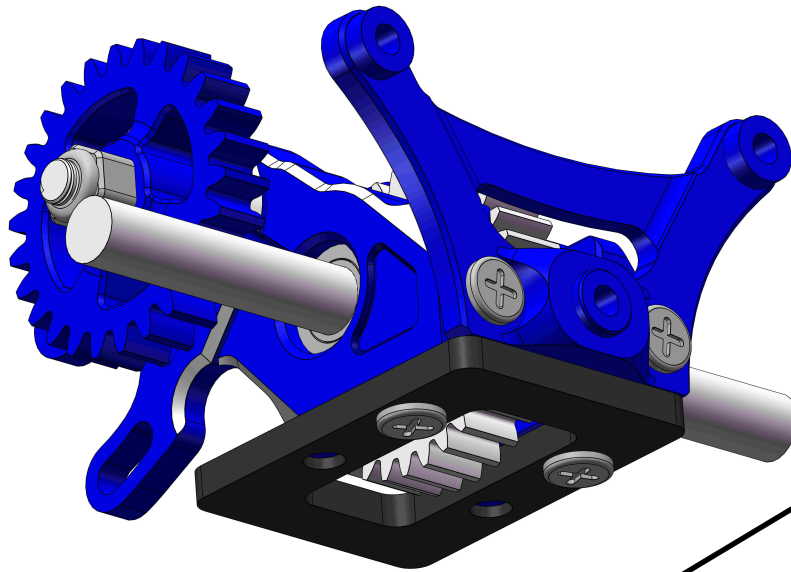

step 14

END

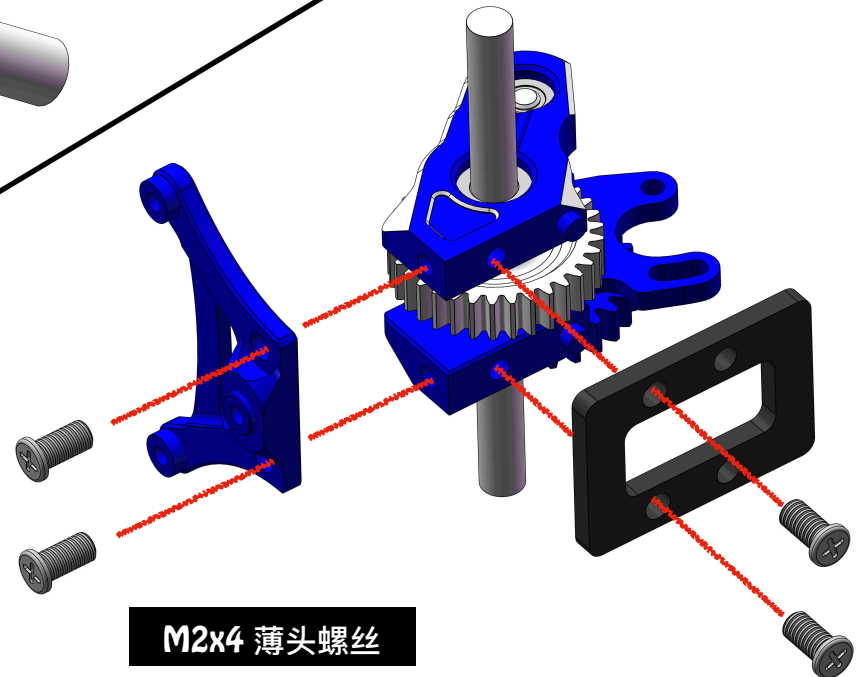

8mm 长弹簧


END

2x5x1.5mm 轴承


3.4x2x0.05MM SHIM

step 15


通过增加合适数量的
垫片来减小转轴虚位

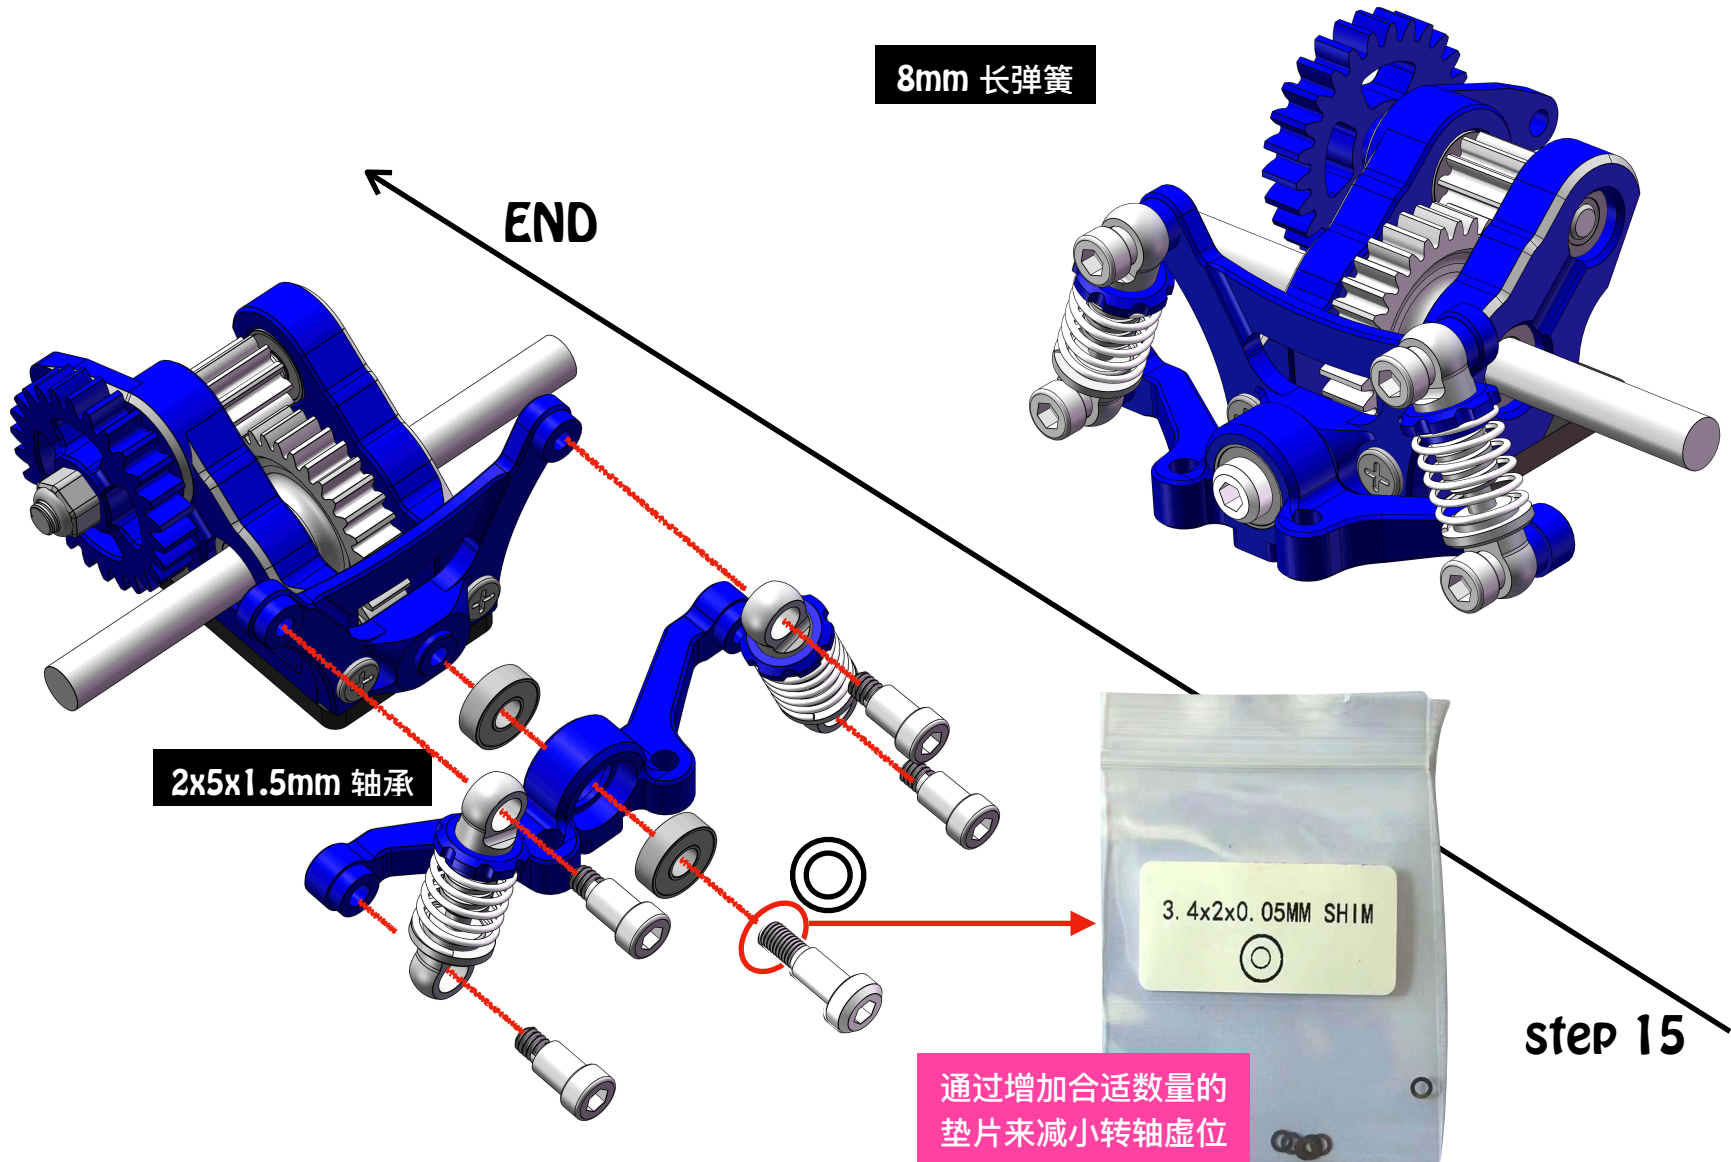

END

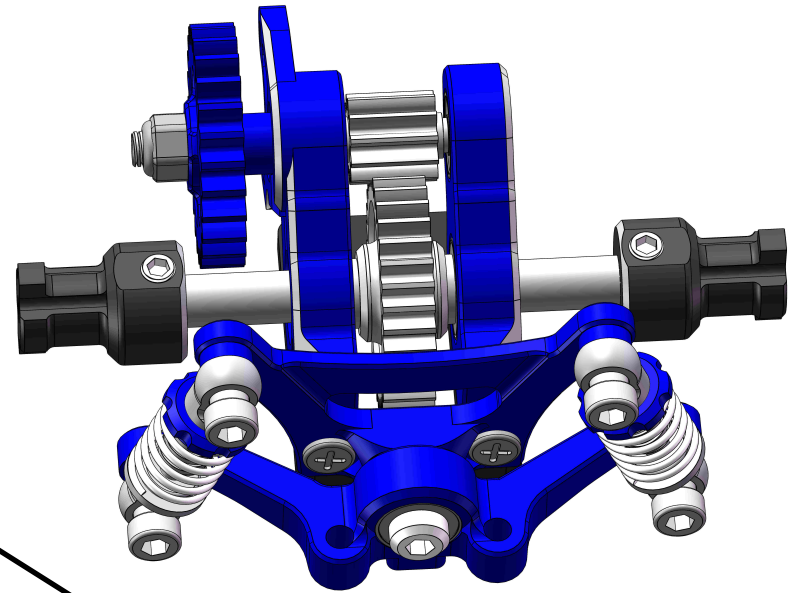

M2x2 机米螺丝

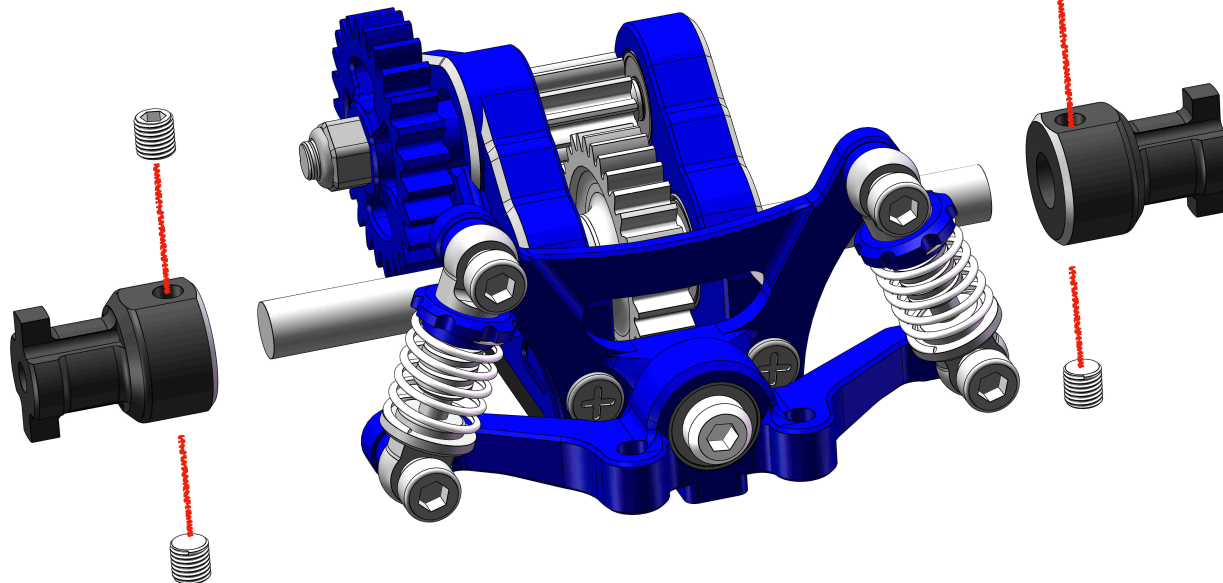



step 16


END


M2x4 薄头螺丝

step 17

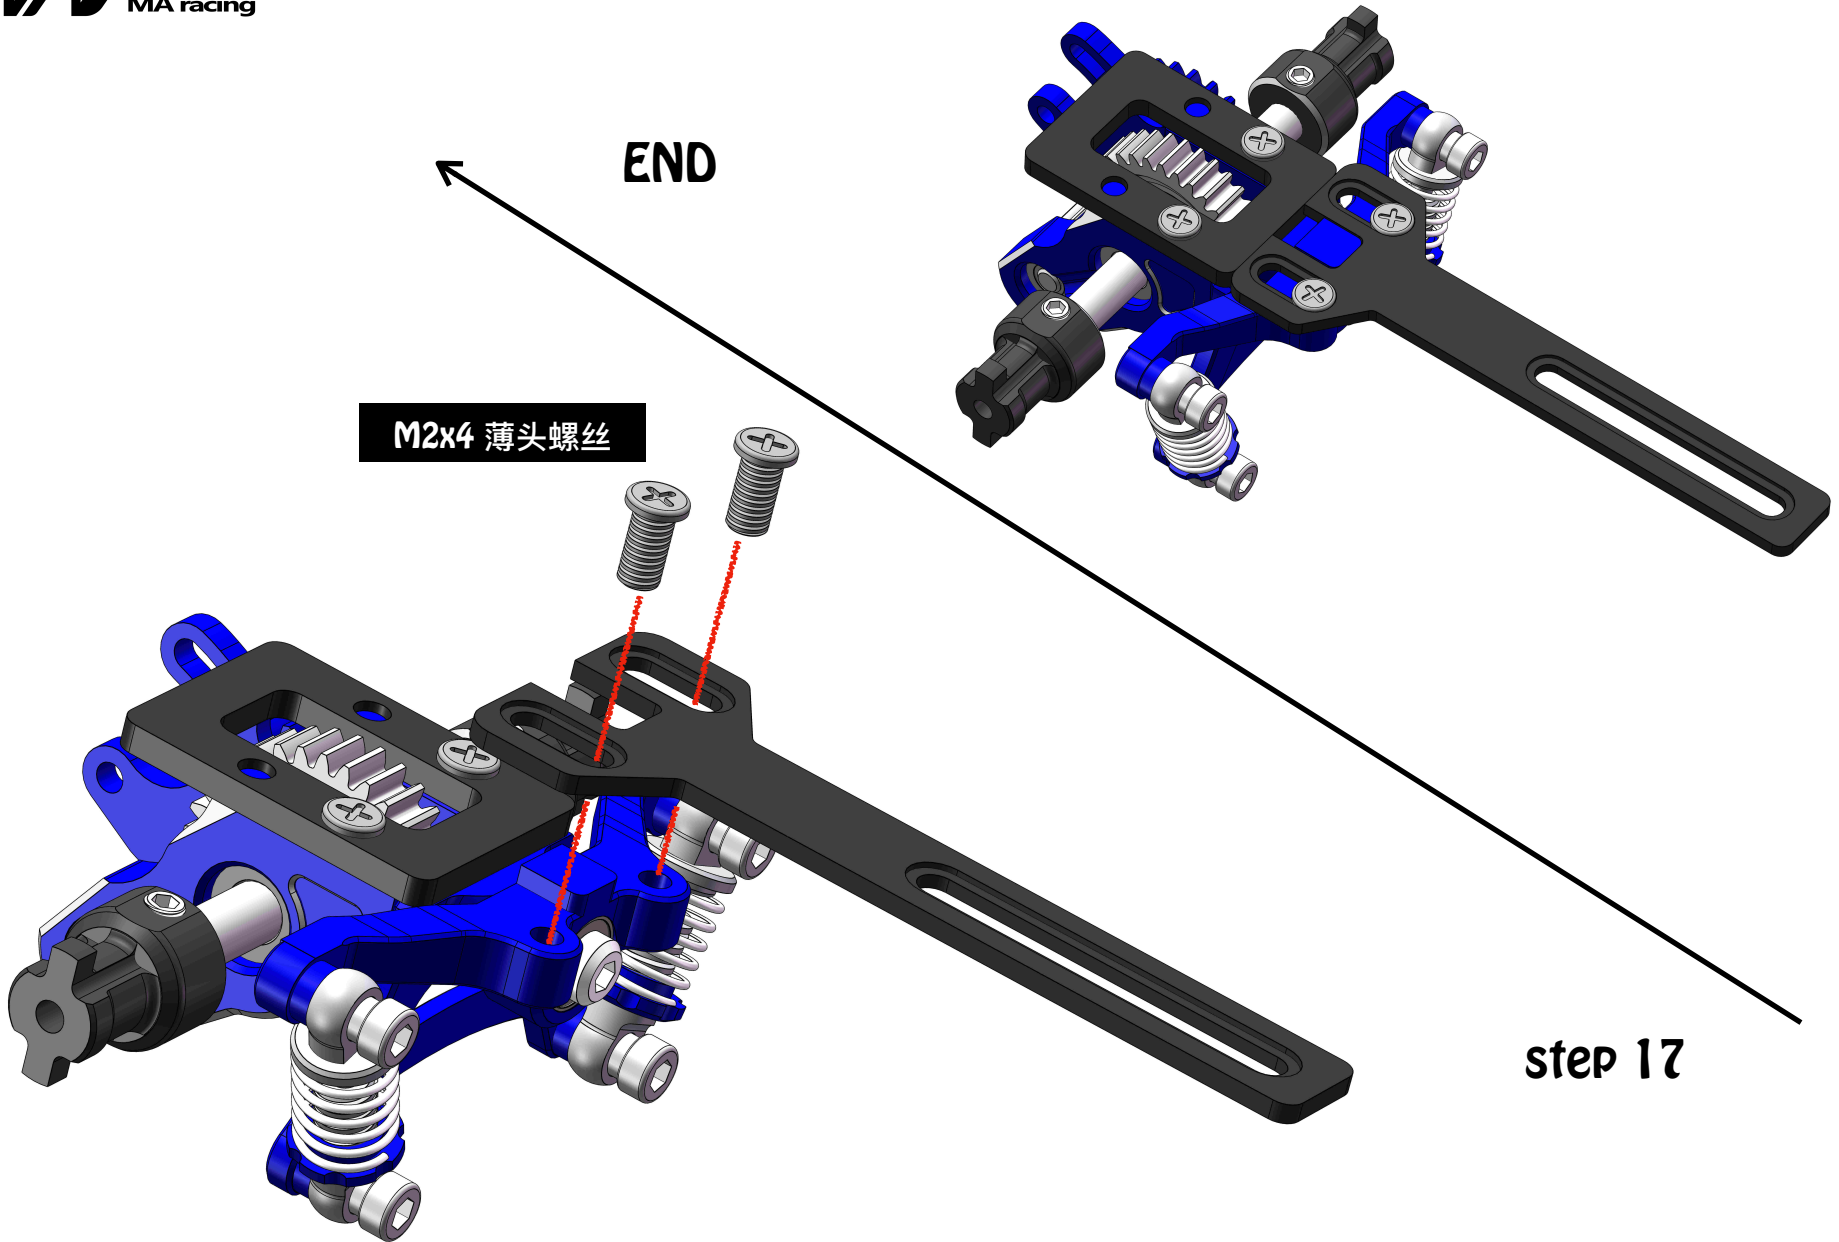

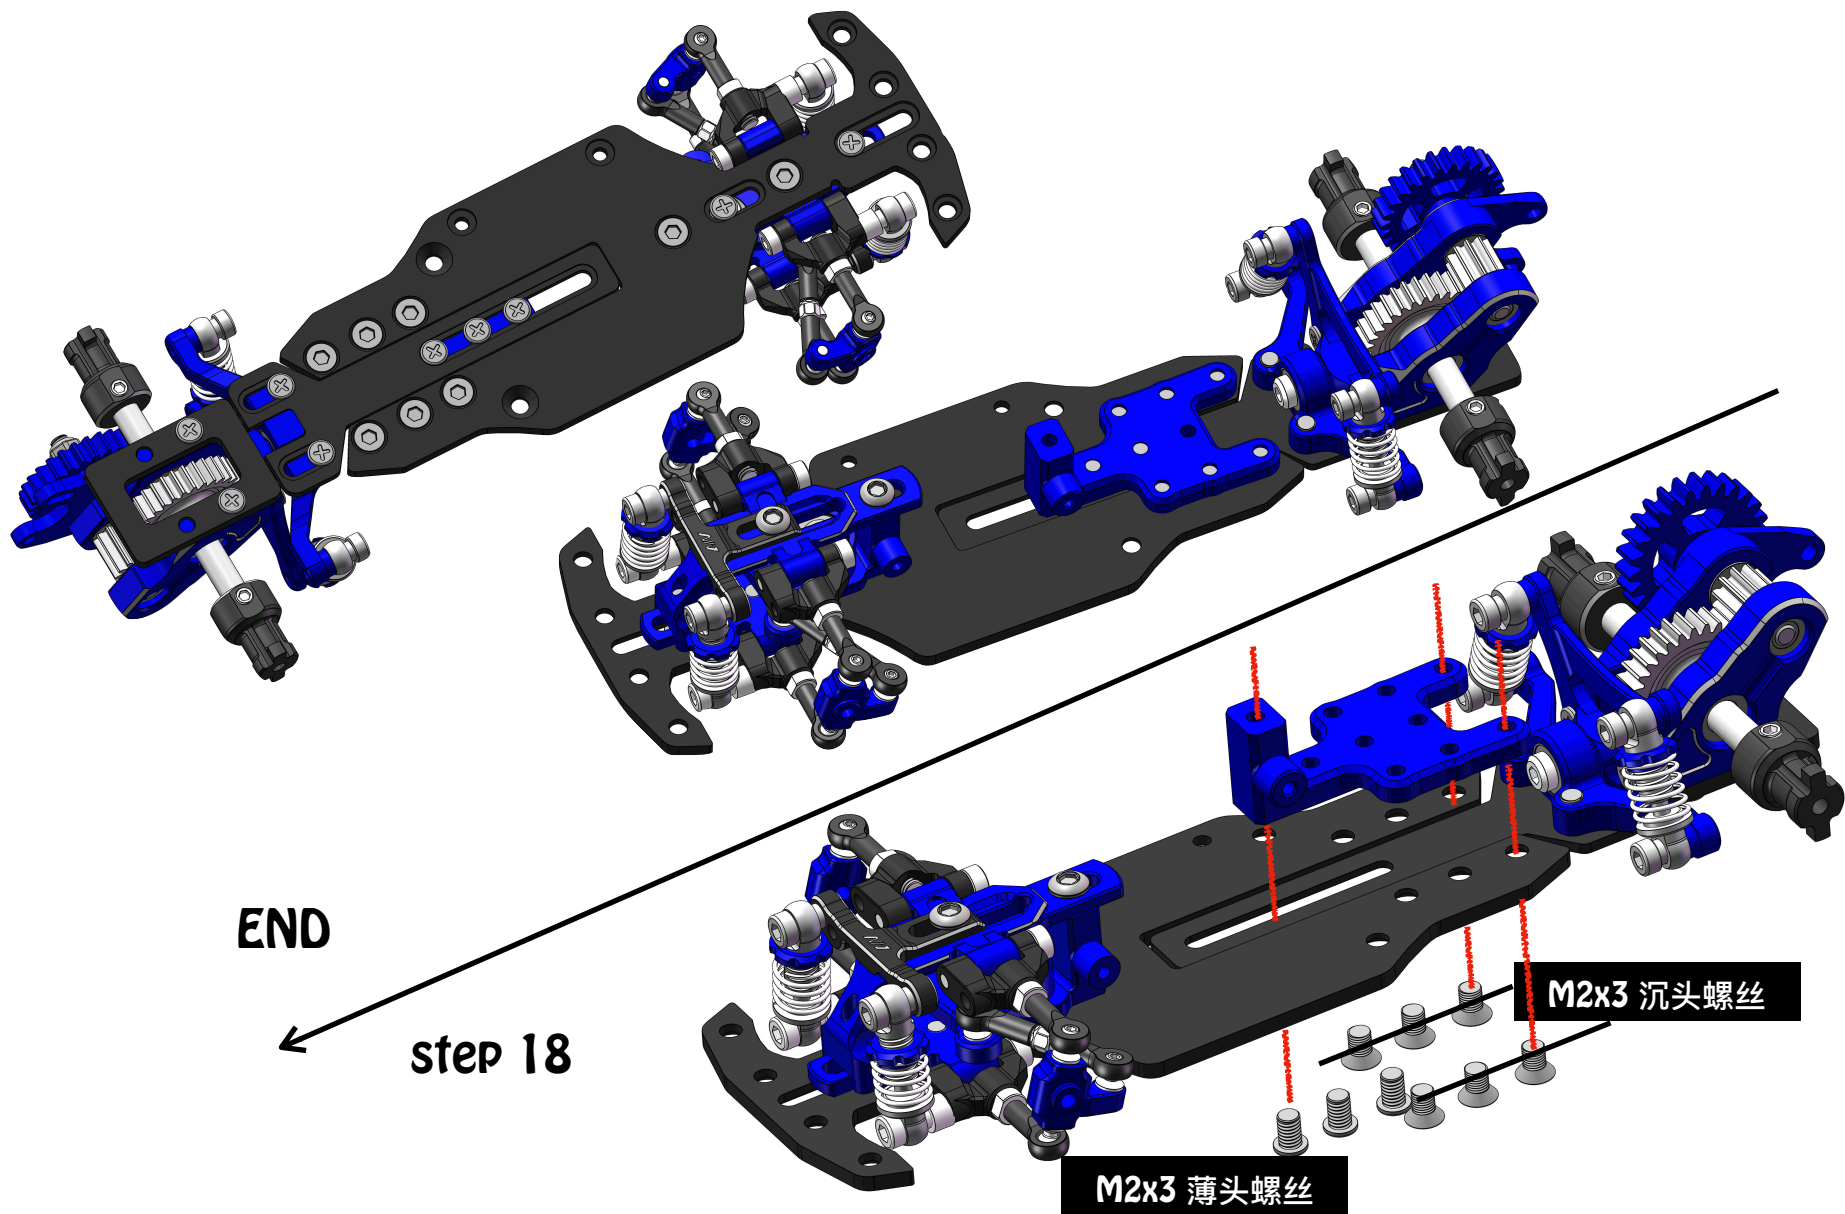

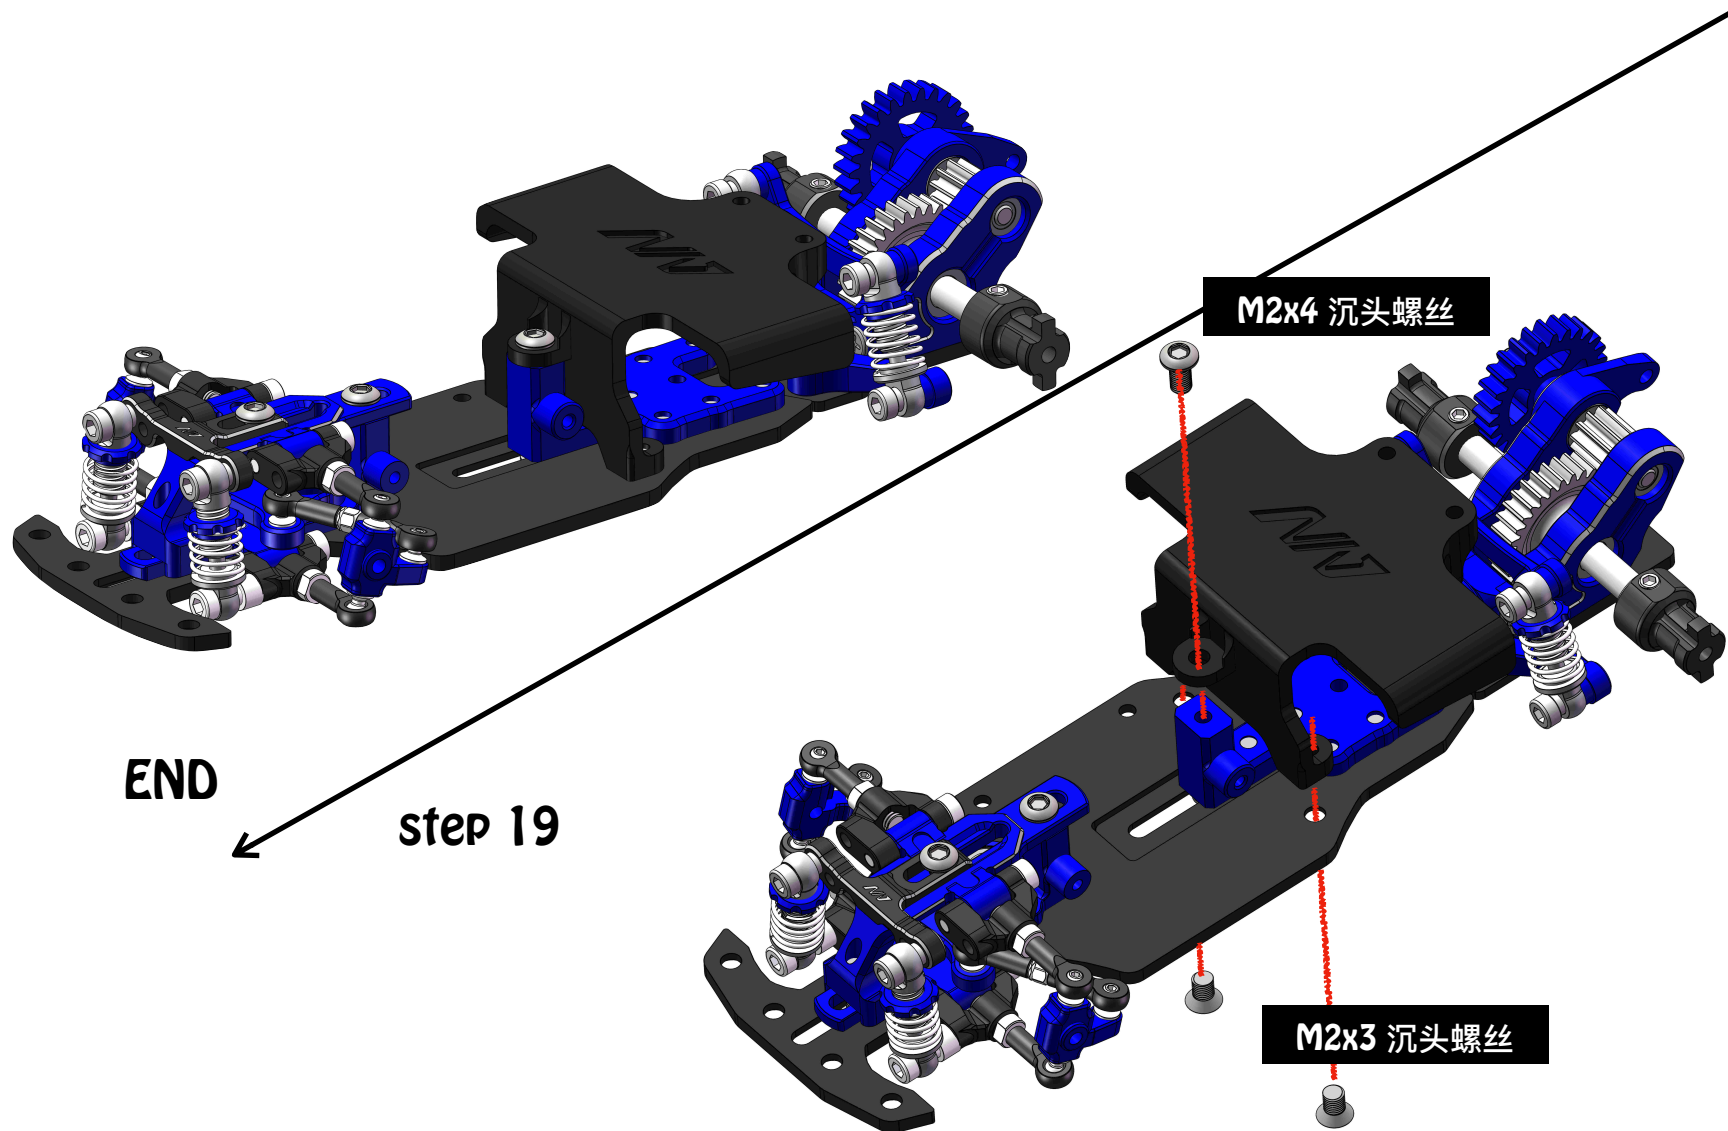

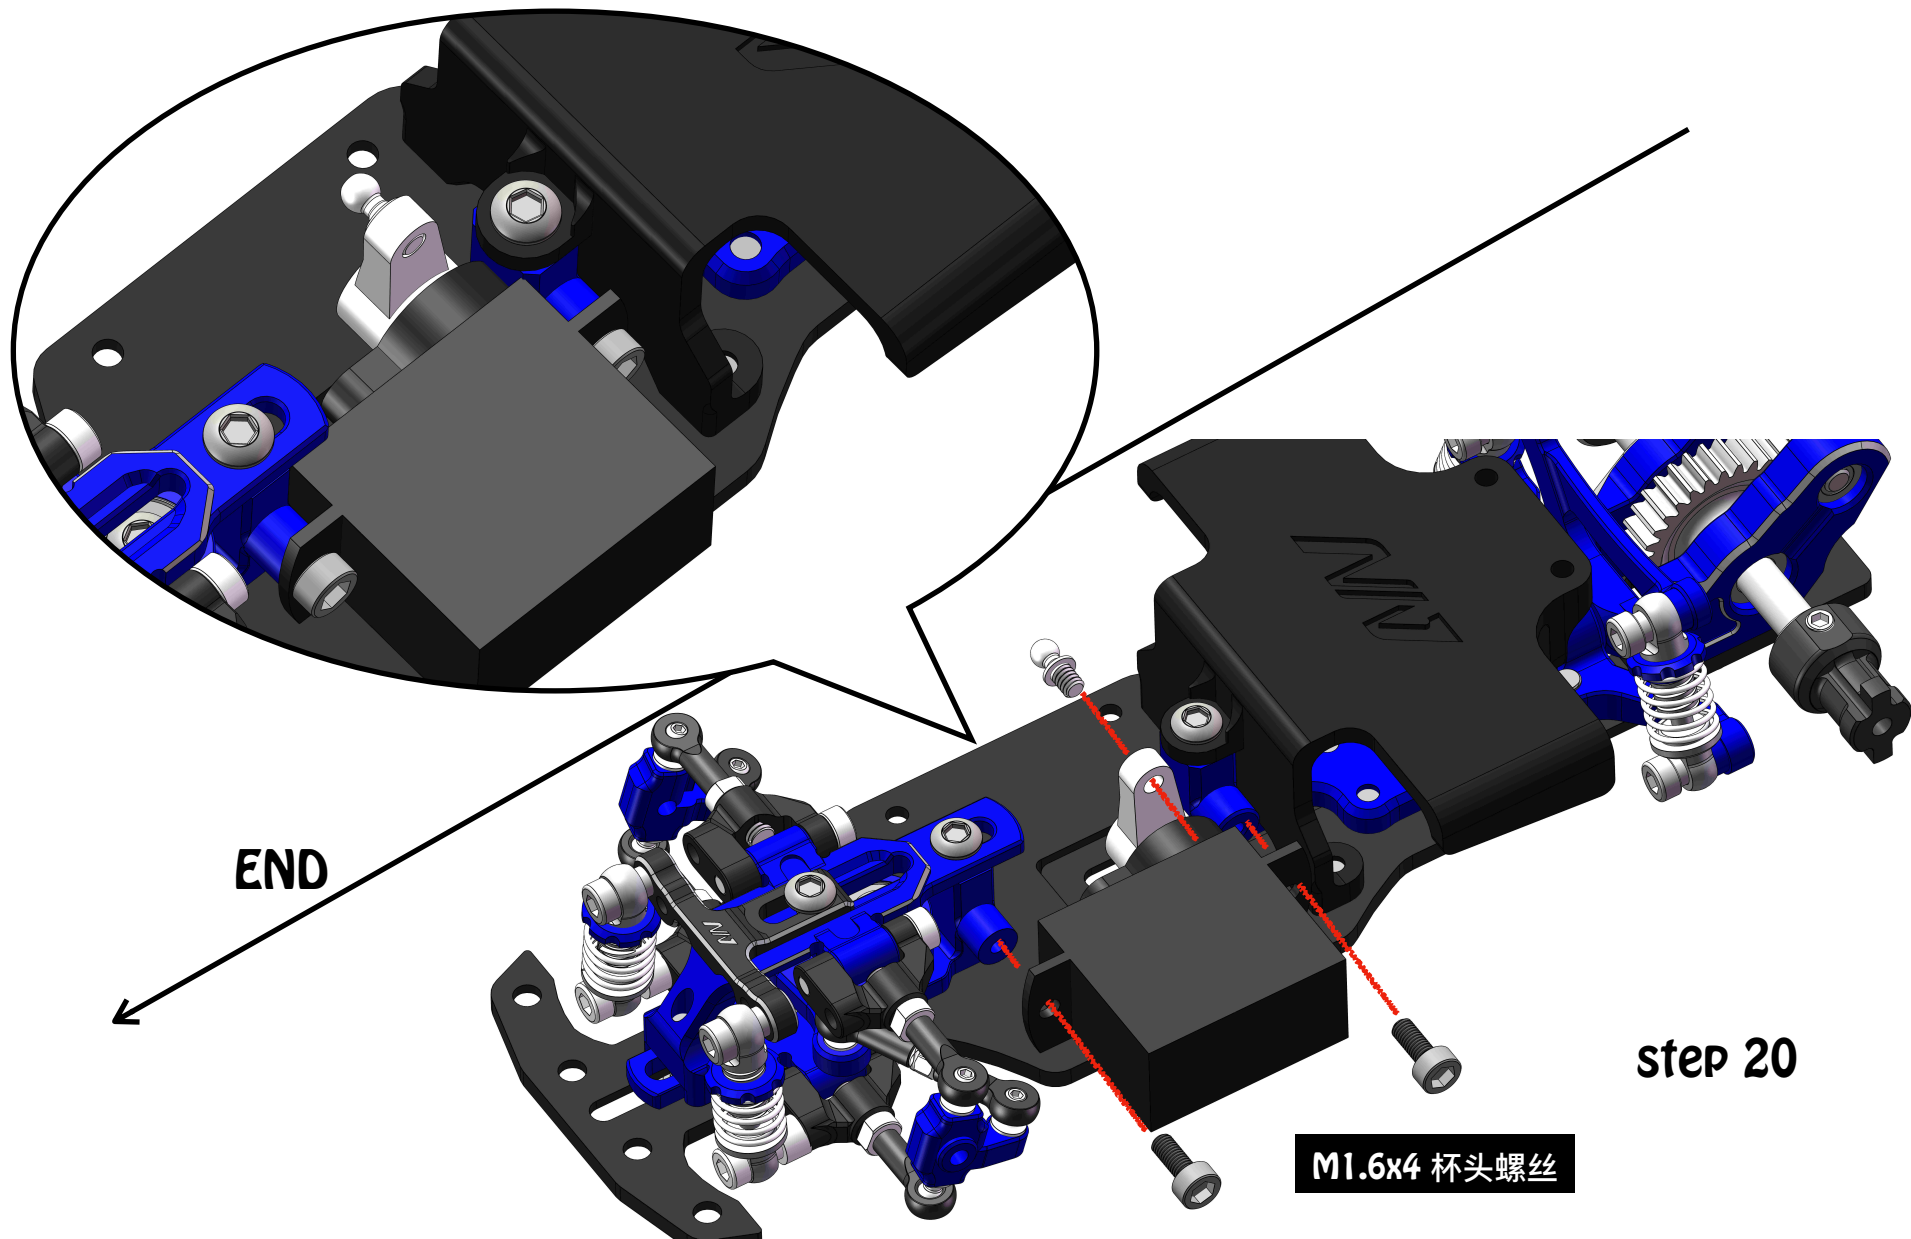


END


step 20


M1.6x4 杯头螺丝

END

step 21

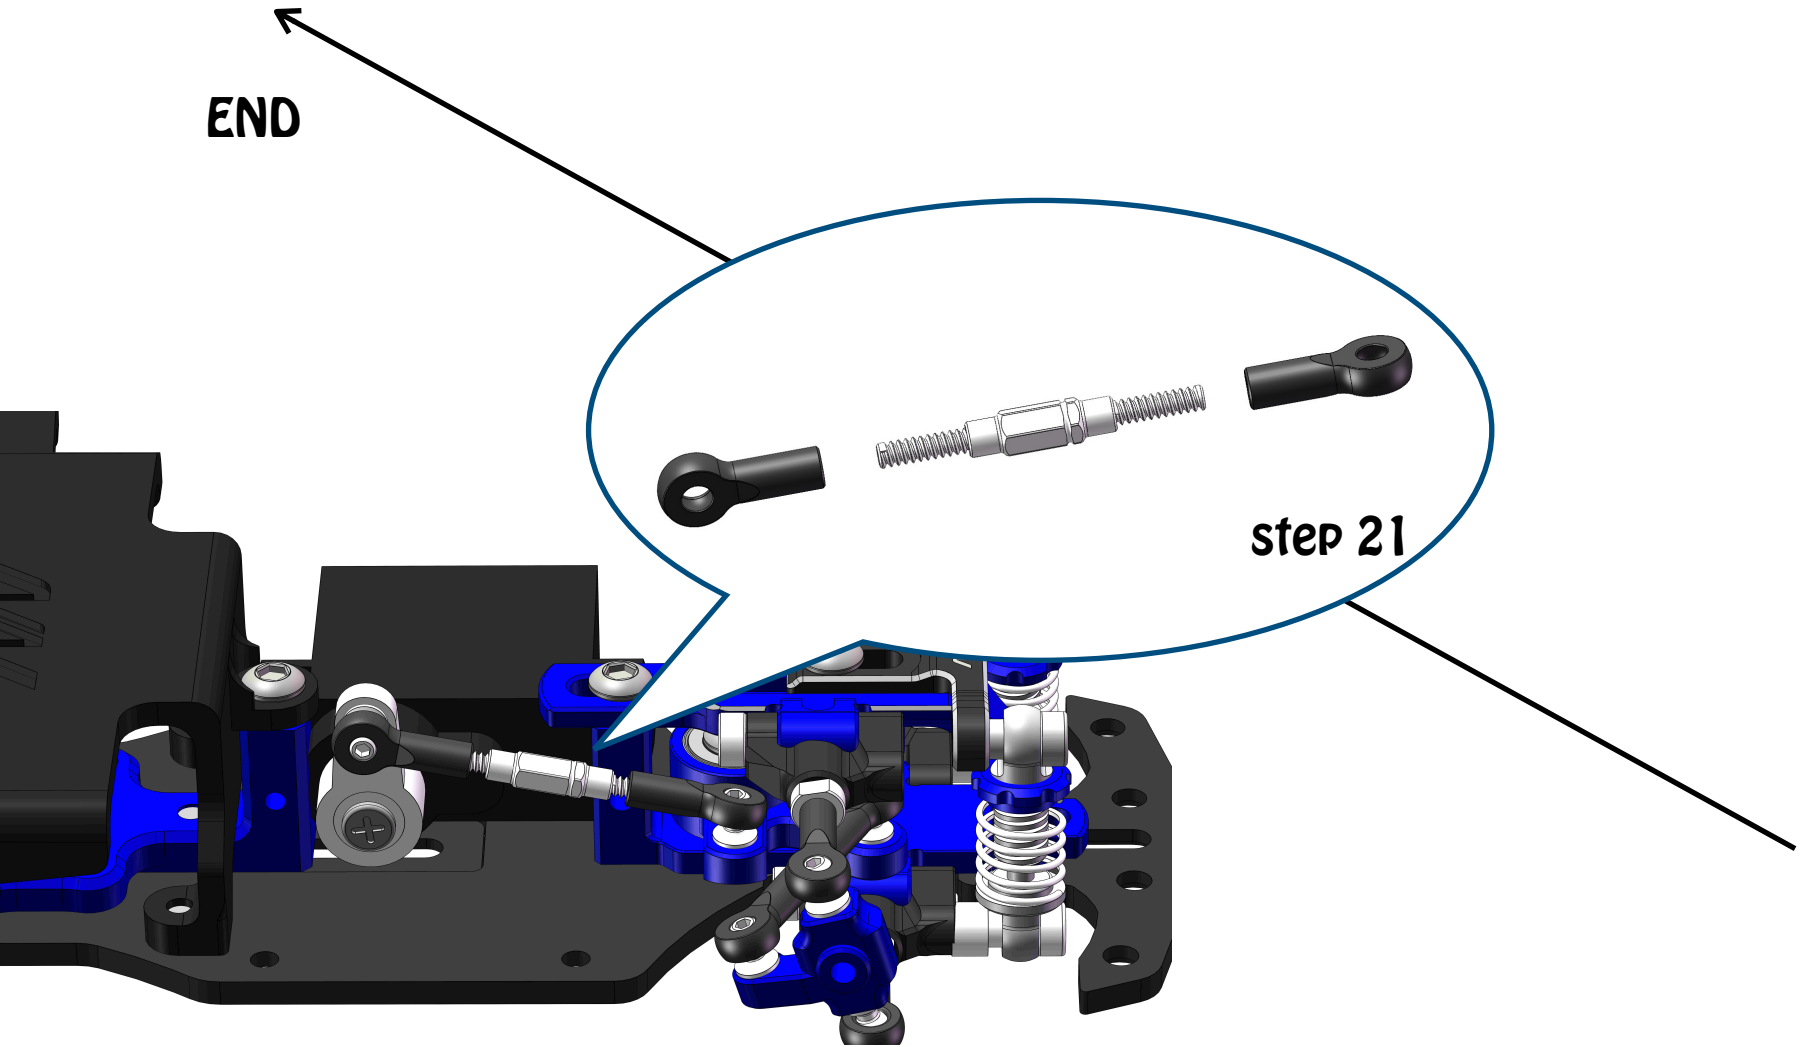


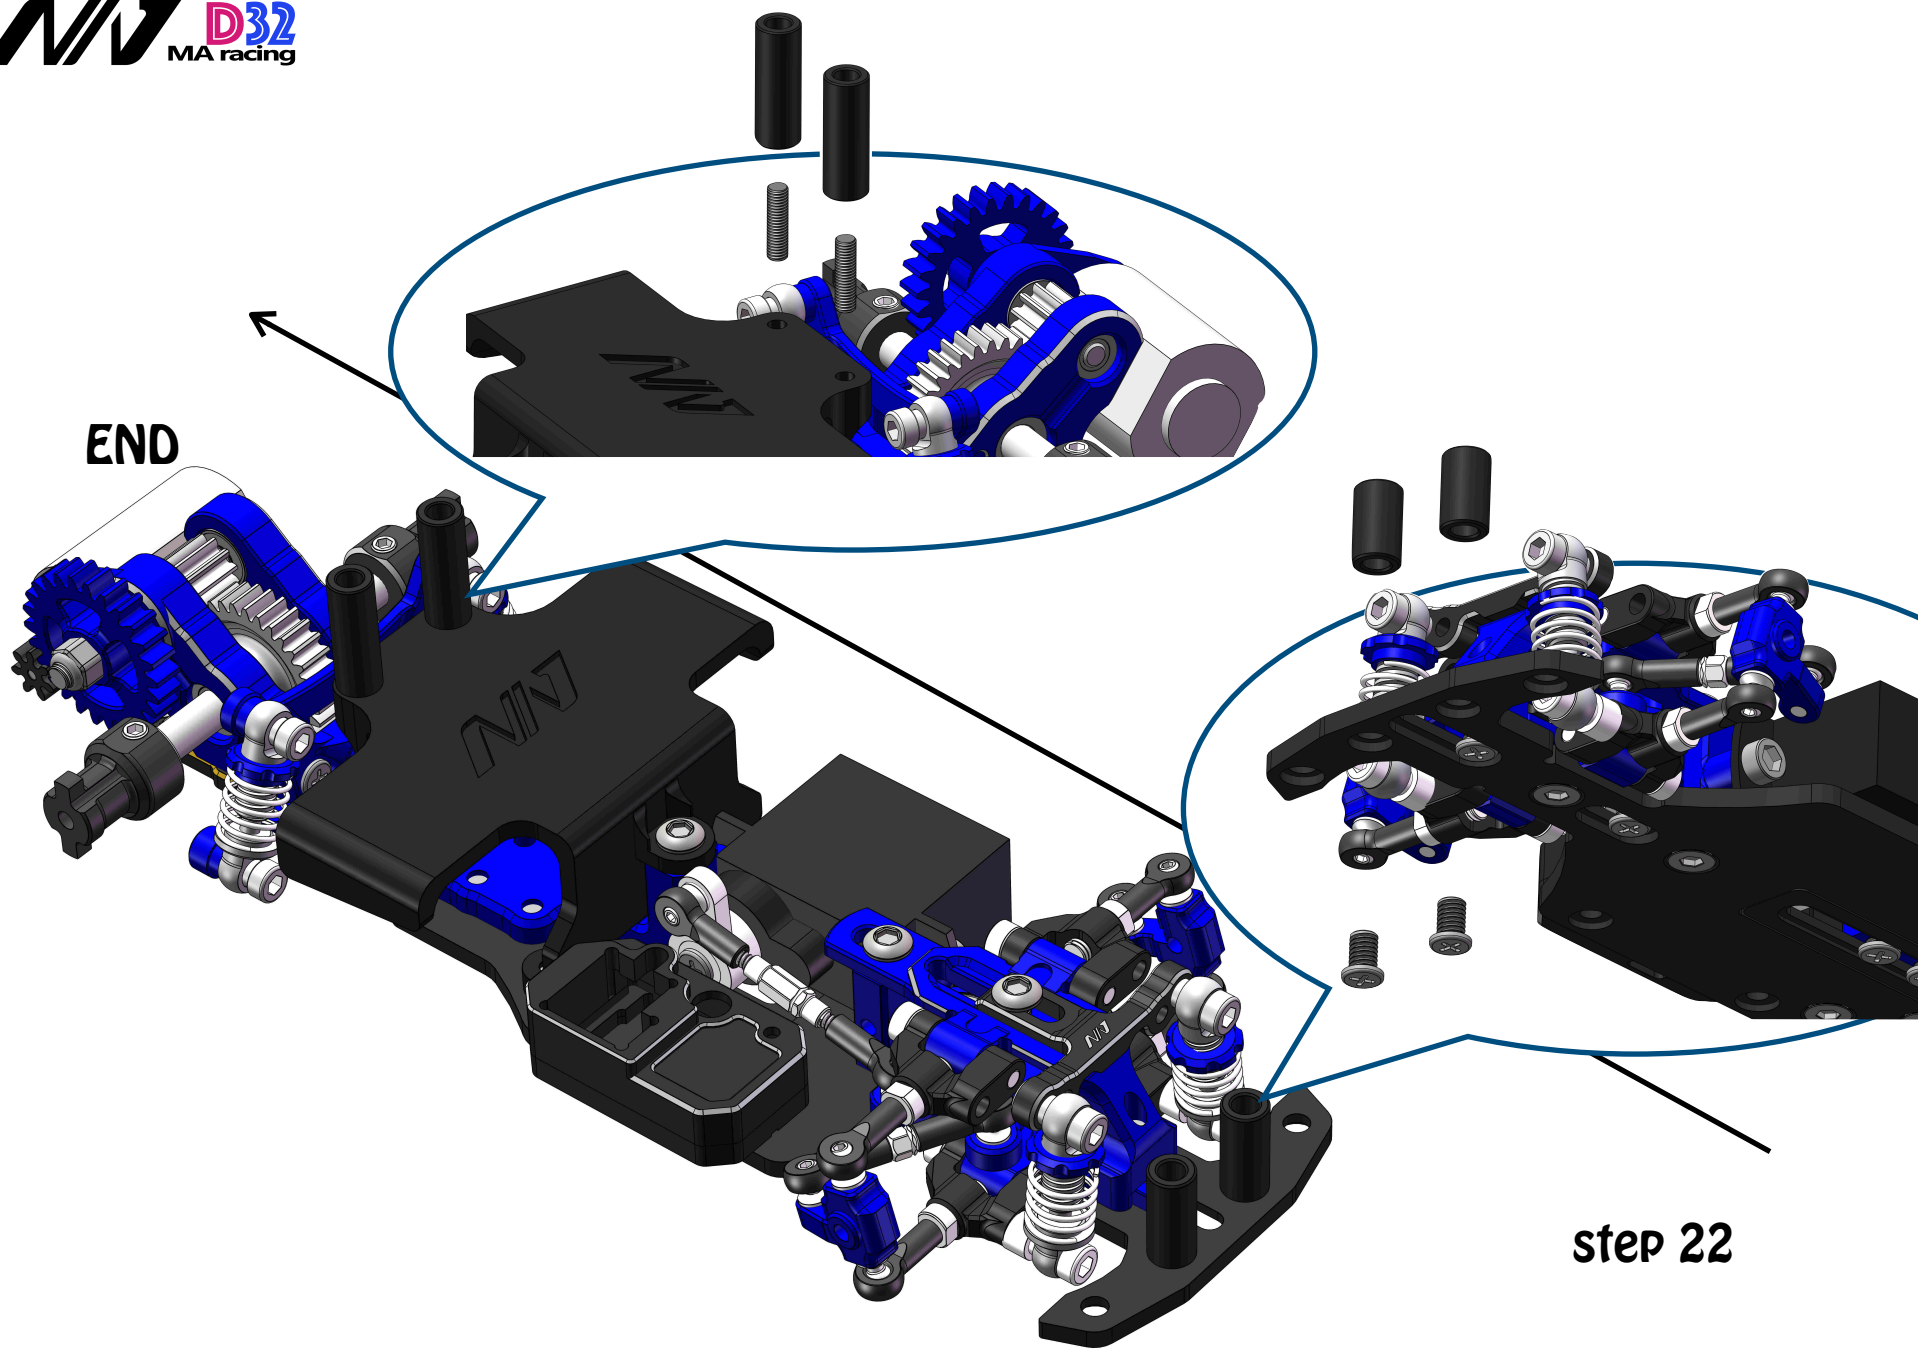


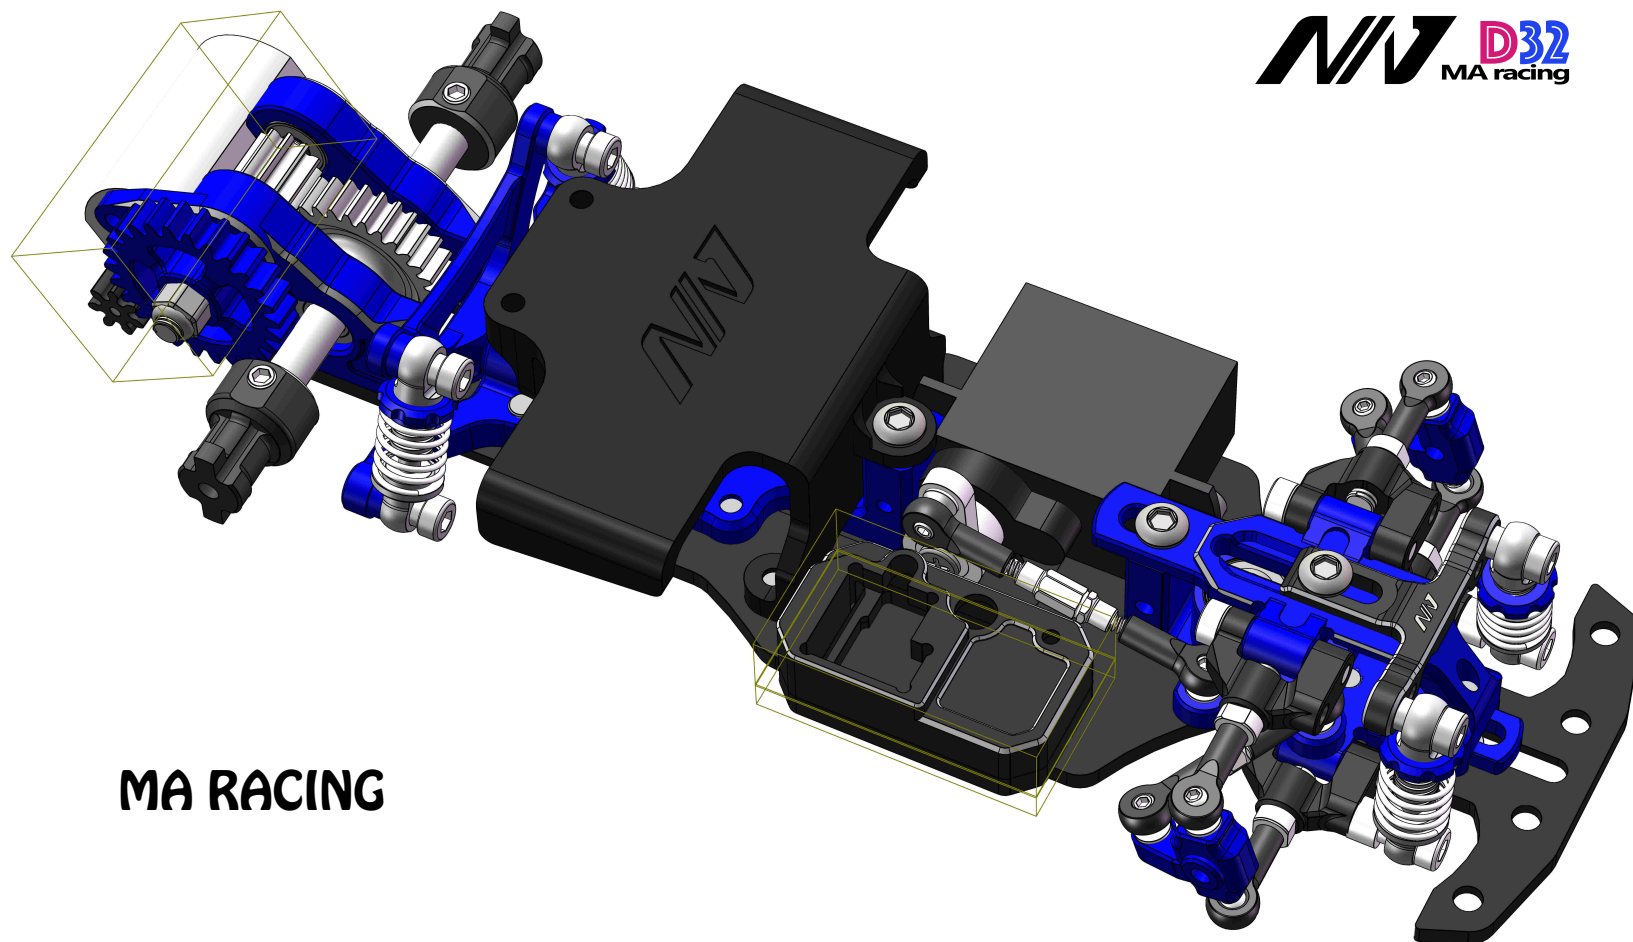

MA RACING

END

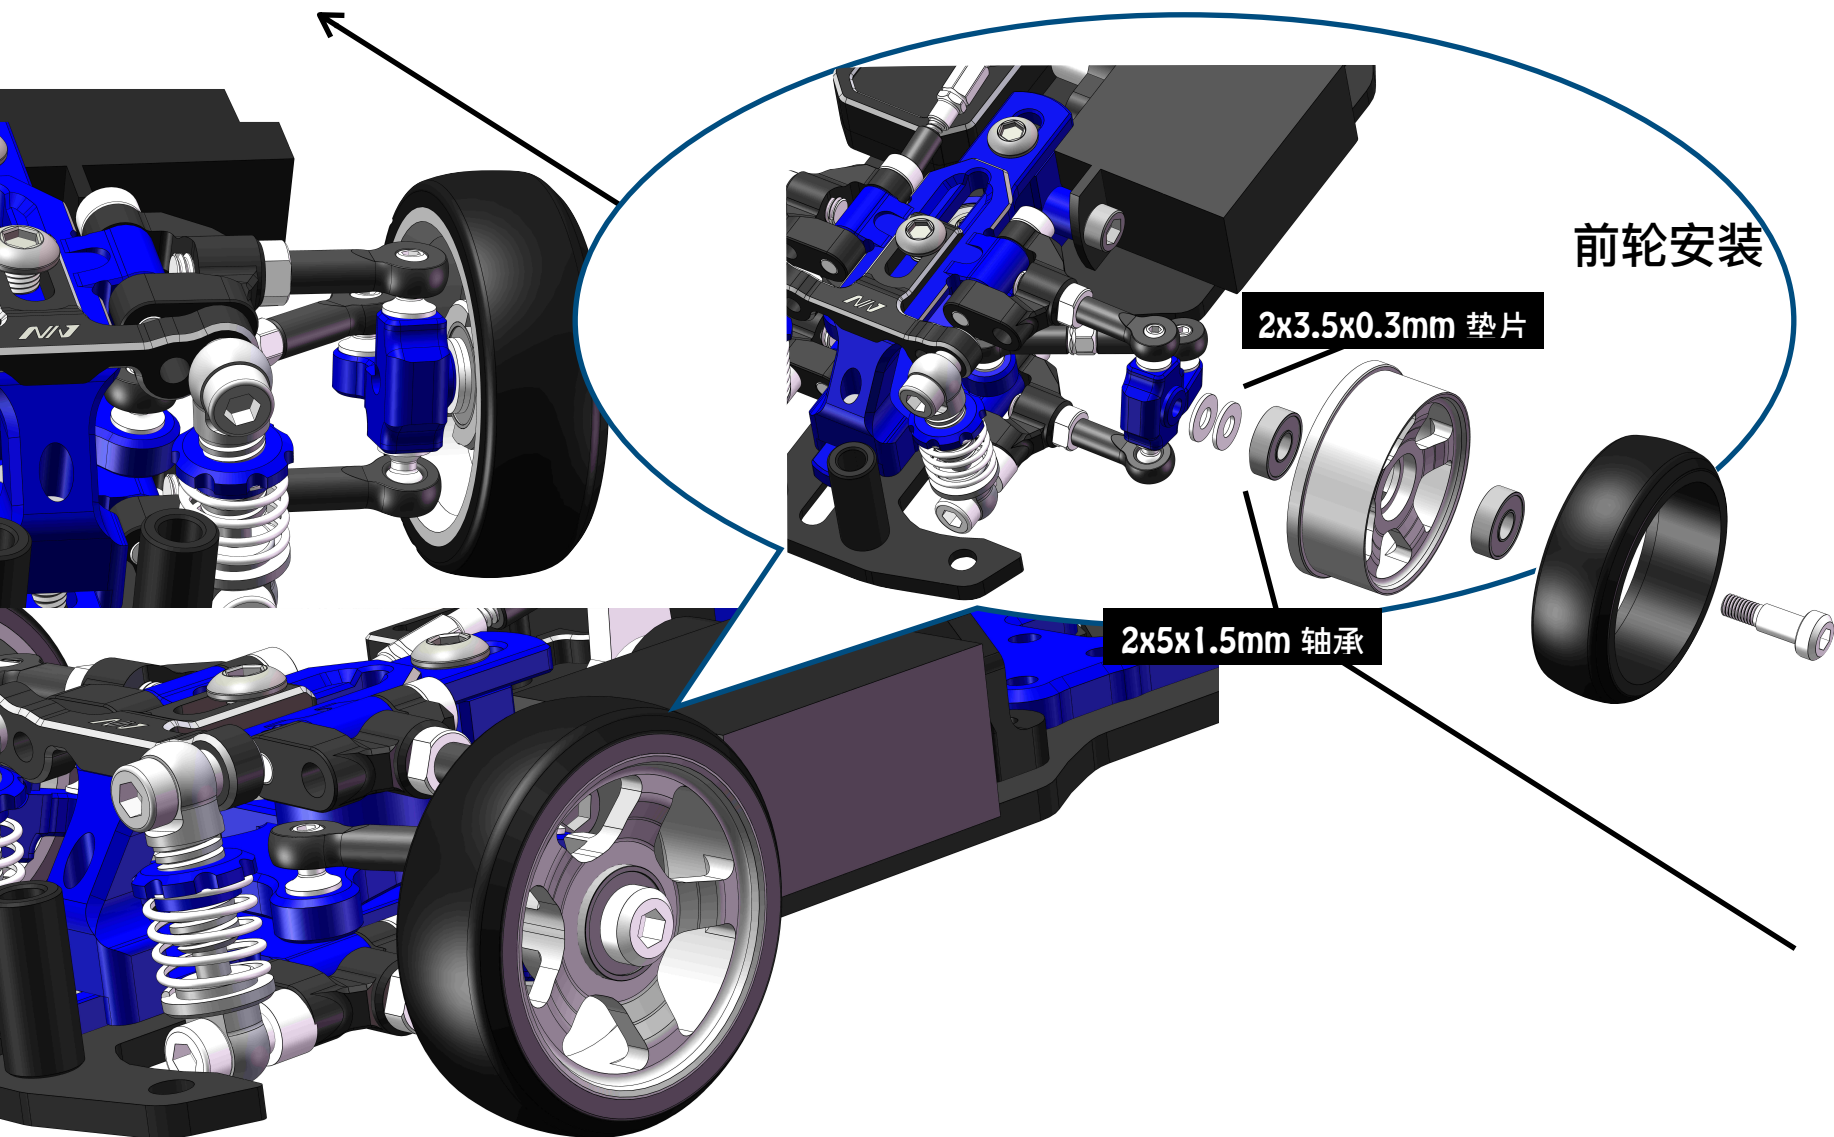

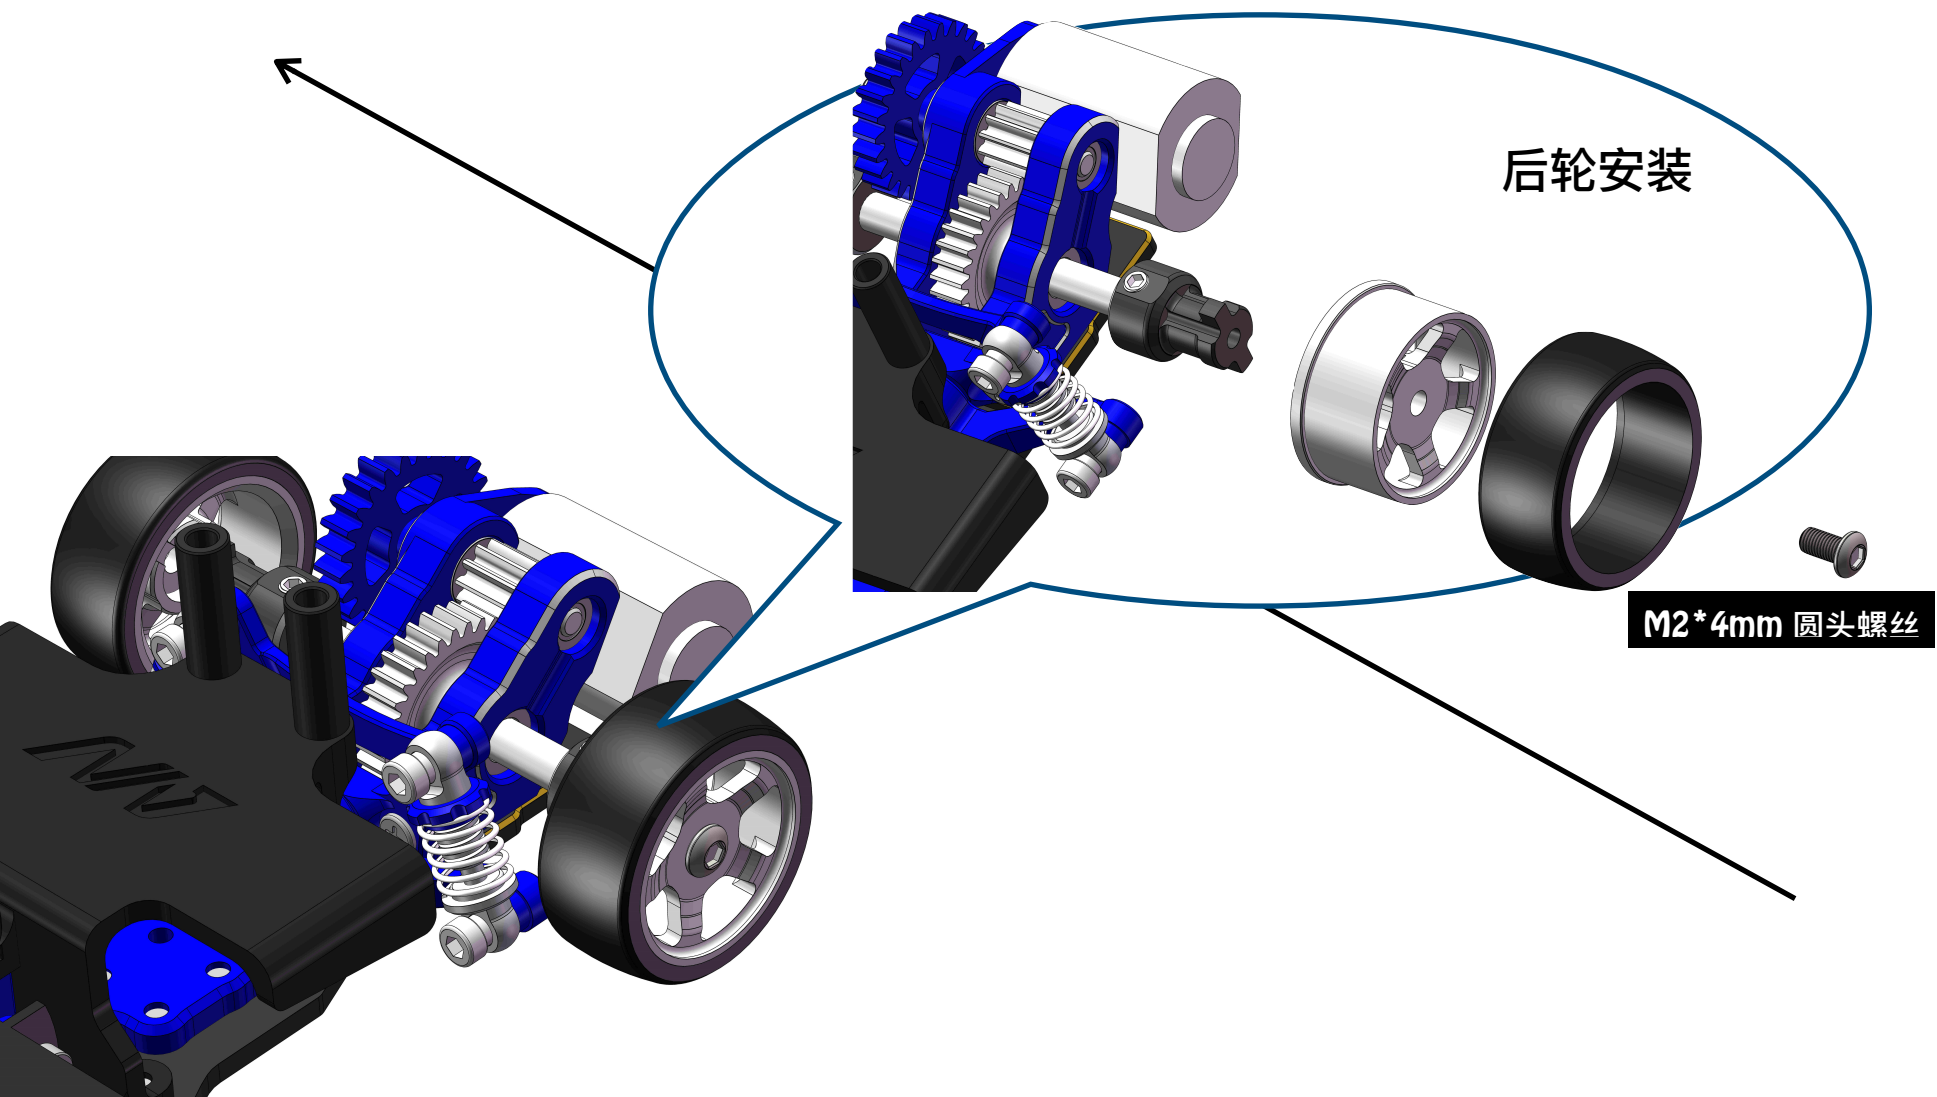

D32

1

32

RWD DRIFTING CHASSIS

NV

MA racing